

BRIEF OVERVIEW OF SEISMIC THREAT POSED BY THE NEW MADRID SEISMIC ZONE

J. David Rogers, Ph.D., P.E., R.G., C.E.G.

Karl F. Hasselmann Chair in Geological Engineering

Natural Hazards Mitigation Institute

University of Missouri-Rolla

UMR

Dinner Presentation - 1

EARTHQUAKES

- 4 million earthquakes occur every year; or about 11,000 each day
- About 6,200 quakes are strong enough for people to notice
- About 800 damaging quakes between Magnitude 5.0 and 5.9 each year
- About 120 destructive quakes with Magnitudes 6.0 to 6.9 each year
- Despite improved building codes, about 15,000 people are killed each year

UMR

Dinner Presentation - 2

QUAKES KILL PEOPLE

- In 1556, 830,000 people were killed in Shensi, China
- 180,000 killed near Kansou, China in 1920 quake
- 9,500 people were killed and 30,000 injured in Mexico City in September 1985 by a M8.1 earthquake 350 km away!
- In 2003, 43,819 people were killed by earthquakes worldwide
- **Geology beneath site is just as important as quake magnitude**

UMR

Dinner Presentation - 3


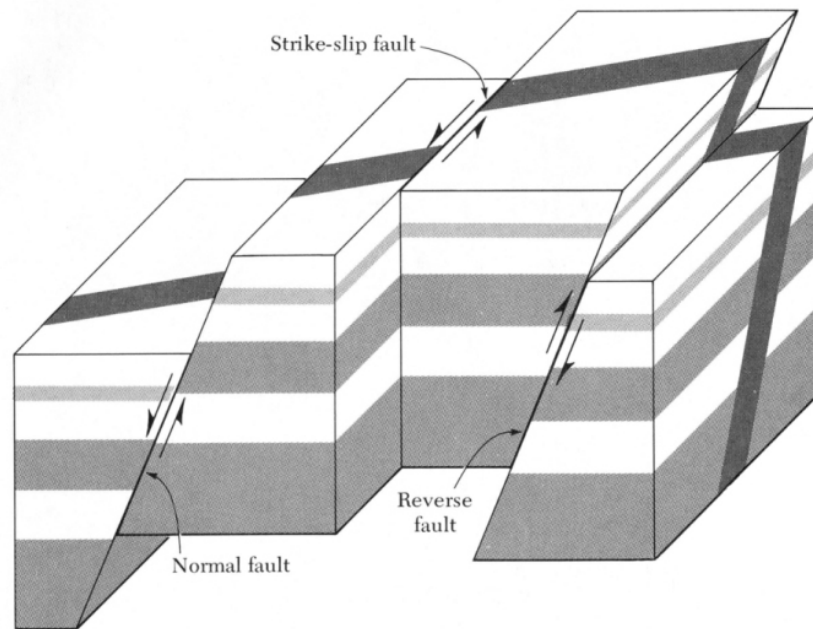


Diagram showing the three main types of fault motion.

U


Earthquake Magnitude versus Energy Release

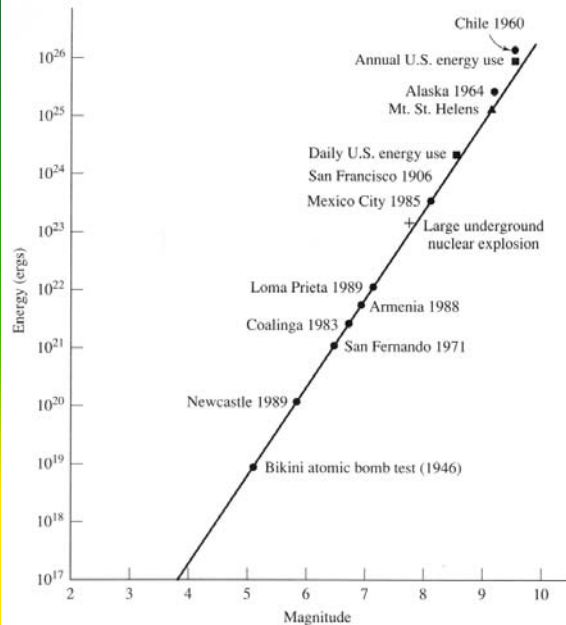

- Modern earthquake magnitudes are based on energy release using a logarithmic scale
- Each numerical magnitude is about 33X the energy release of preceding numerical value

UMR



Dinner Presentation - 5

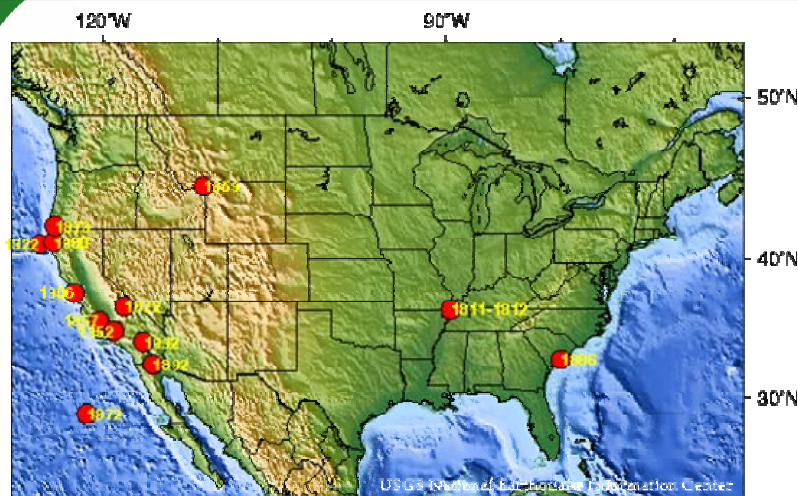

- In 1663 the European settlers experienced their first earthquake in America. From 1975-1995 there were only four states that did not have any earthquakes: Florida, Iowa, North Dakota, and Wisconsin. The most damaging earthquakes have occurred in California, Nevada and Alaska. Should we be concerned in the Midwest?

UMR

Dinner Presentation - 6

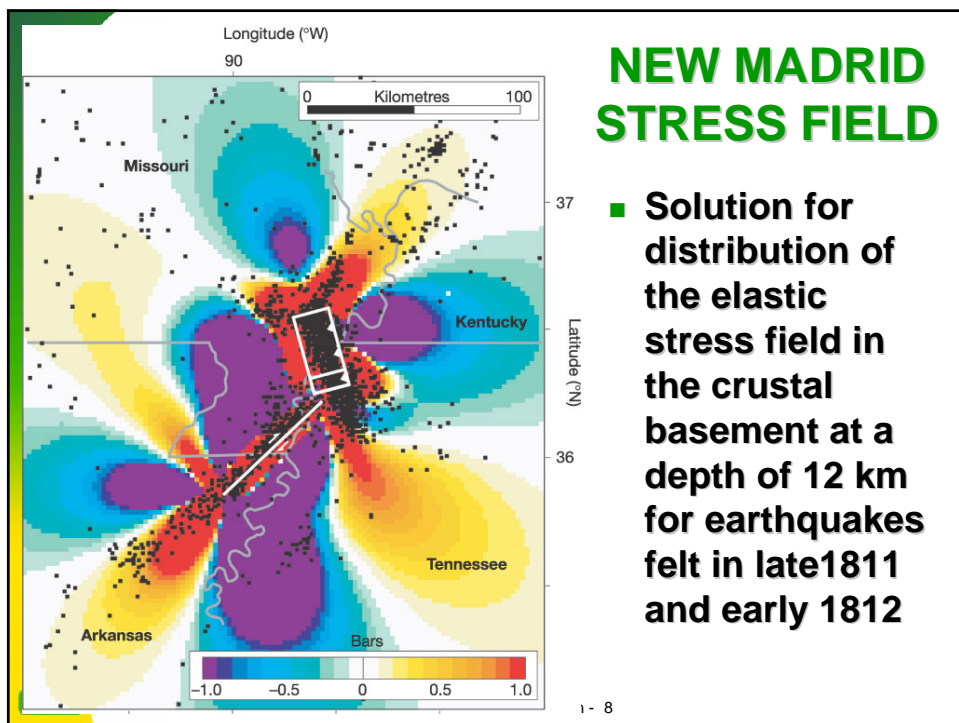
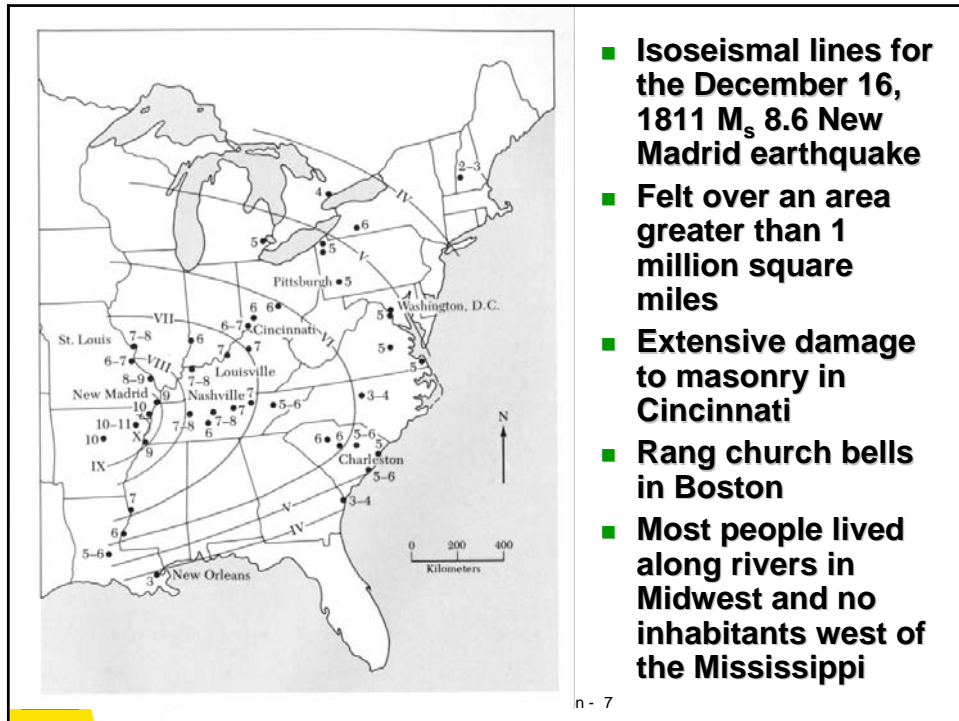


NEW MADRID SEISMIC ZONE


- 2000 quakes in New Madrid Seismic Zone in 1811-12; four with $M > 7.5$
- Felt over 1 million square miles!
- Chimneys toppled in Cincinnati, Ohio, 560 km away
- Raised and lowered vast tracts of land as much as 20 feet, temporarily reversing flow of Mississippi River
- Ground fissures and massive liquefaction over a zone measuring 240 x 80 km!

POST 1812 SEISMICITY in NEW MADRID SEISMIC ZONE

- **M6.3** quake in Marked Tree, AR in 1843; did considerable damage to Memphis, 60-70 km east
- **M6.6** quake in Charleston, MO in 1895; Felt in 23 states, 30 km of sand blows
- **M5.4** in Wabash Valley (Dale, IL) in 1968; also felt in 23 states; light damage in St. Louis
- **M5.0** in Wabash Valley west of Vincennes, IN (Olney, IL) in 1987
- **M4.6** near Evansville, IN in 2002

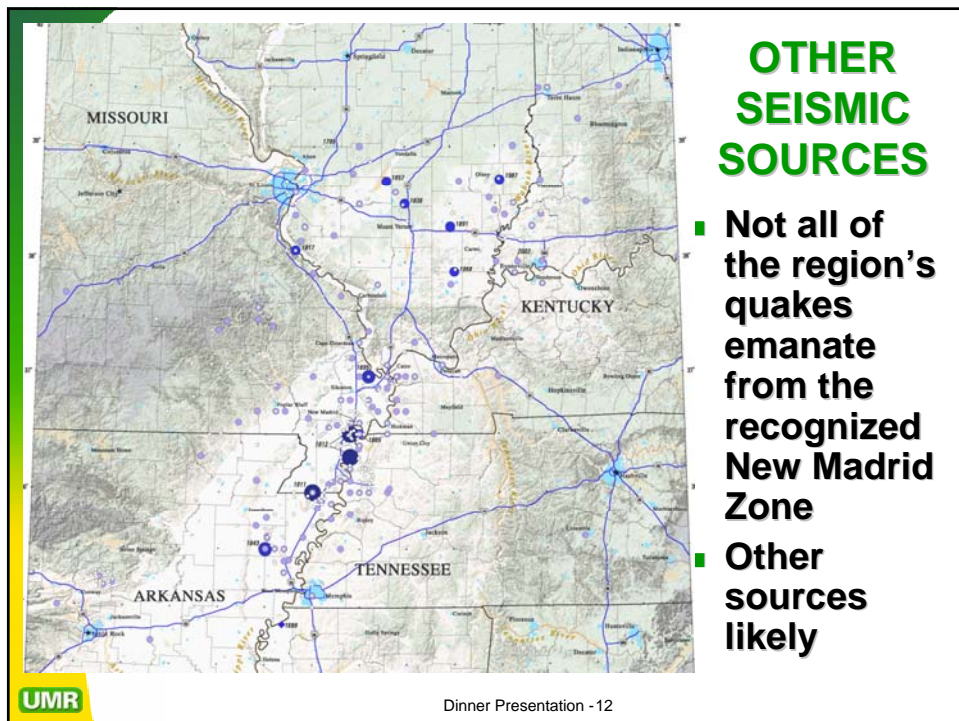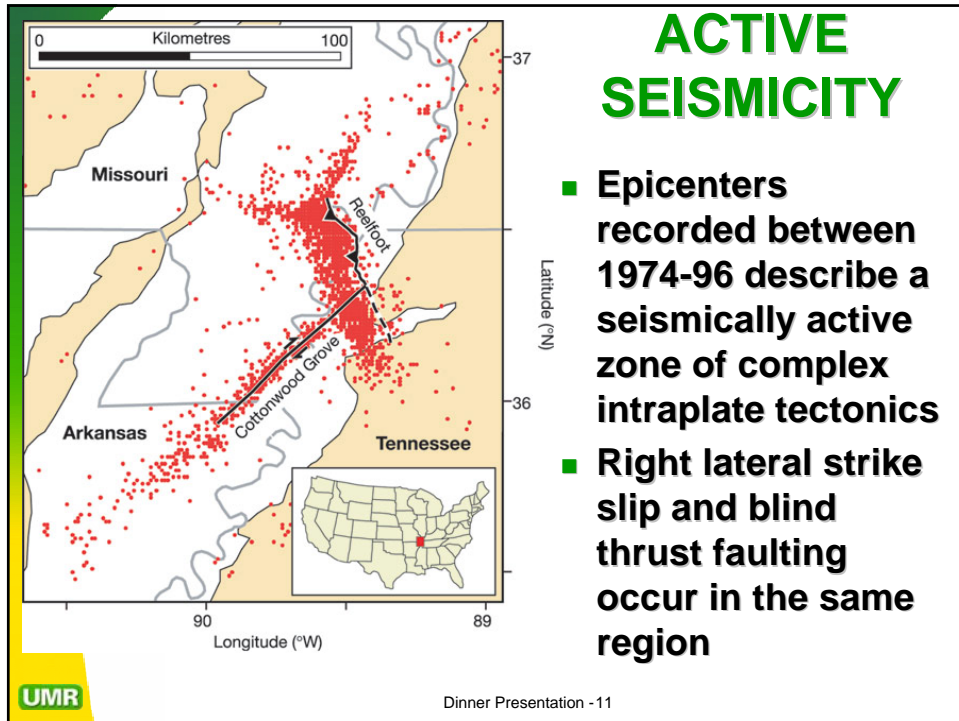

DAMAGE POTENTIAL

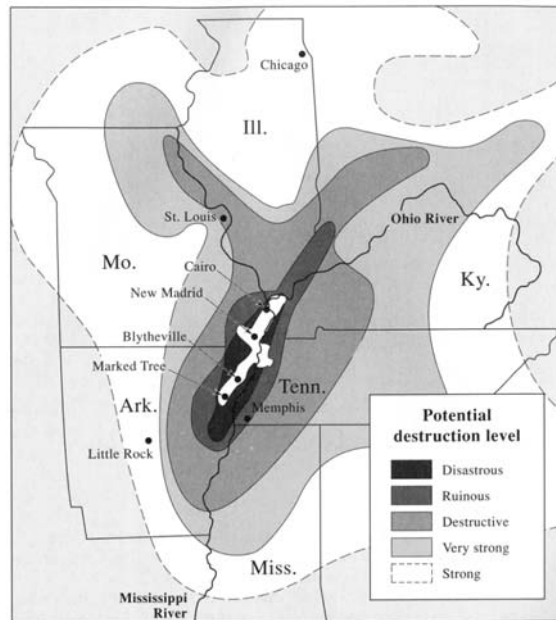

Published damage predictions for the New Madrid Seismic Zone have focused on the near field area, in the upper Mississippi Valley

These are based on synthetic motion time histories with assumed soil cover; not on site specific characteristics or dynamic properties of structures.

UMR

Dinner Presentation -13


EARTHQUAKE MECHANISMS THAT COMMONLY IMPACT STRUCTURES

- Surface fault rupture hazards
- Ground waves and fling effects
- Topographic enhancement of seismic energy
- Dynamic consolidation of soils
- Liquefaction and lateral spreading
- Site amplification effects
- Long period motion and resonant frequency effects
- Out-of-phase structural response

UMR

Dinner Presentation -14

SURFACE FAULT RUPTURE HAZARDS

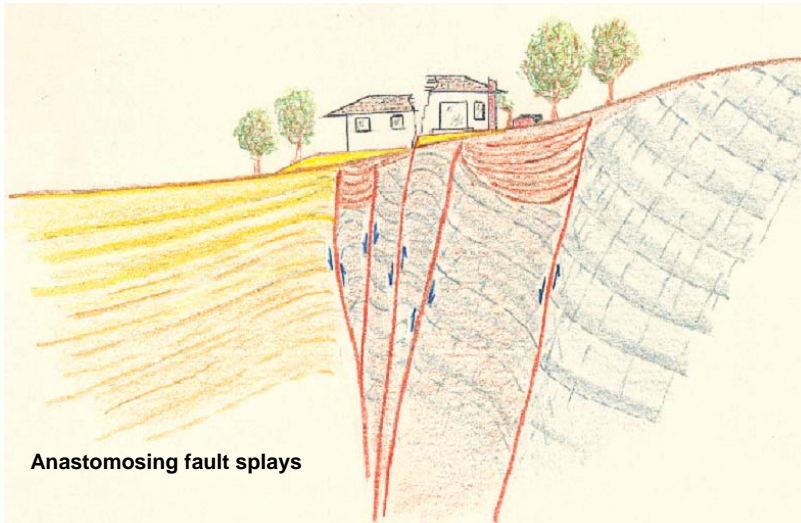

Anastomosing fault splays

- Major active faults usually extend up to the ground surface, where they can pose a threat to structures. Only about 2% of earthquake-induced structural damage is caused by surface fault rupture. Various fault strands identified near the ground surface may be active, dormant or ancient, as shown above.

UMR

Dinner Presentation -15

SURFACE RUPTURE




- Only a small percentage of earthquakes actually cause noticeable surface fault rupture
- Sometimes it is rather discrete (upper left)
- On other occasions it can be very abrupt and graphic (lower left)

UMR

Dinner Presentation -16

FREE BOUNDARY/ GROUND WAVE EFFECT

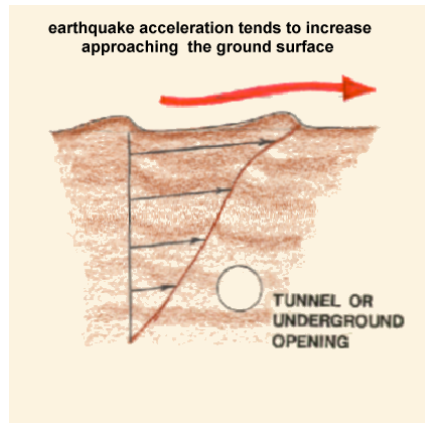


- As the seismic wave train propagates upward and along the Earth's surface, the peak ground accelerations will tend to increase at the ground surface because there is no confinement. Tunnels and underground openings usually record much lower values of acceleration due to their increased confinement.

UMR

Dinner Presentation -17

TOPOGRAPHIC INFLUENCE ON SITE RESPONSE

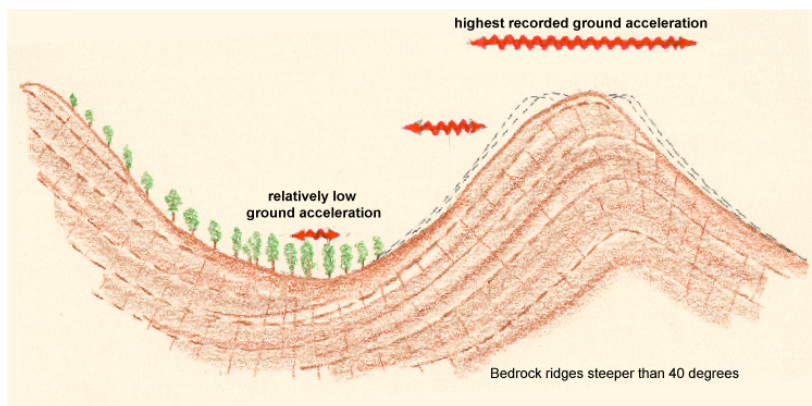


- Steep-sided bedrock ridges usually experience much higher accelerations during earthquakes because they are less laterally constrained. In the October 1989 Loma Prieta earthquake the PGA of 0.77g was recorded in the valley bottom at Corralitos. Estimates of PGA values for the adjoining ridges were in excess of 1.30g.

UMR

Dinner Presentation -18

DYNAMICALLY-INDUCED SETTLEMENT OF A VALLEY FILL

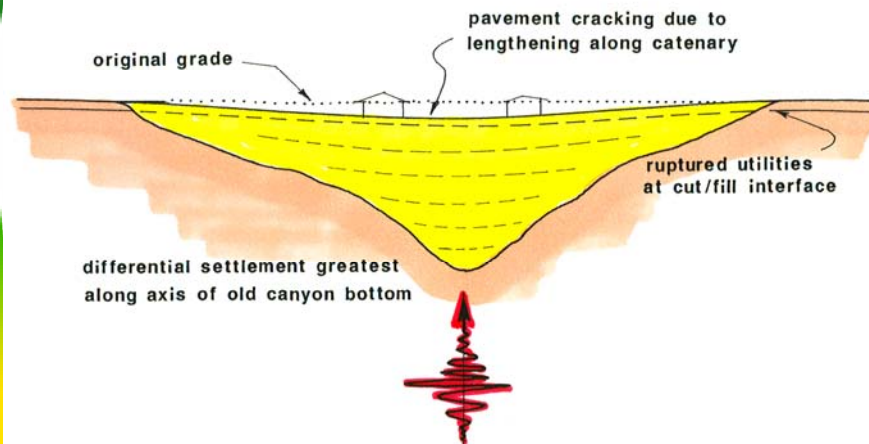


- Fill embankments tend to consolidate and settle under dynamic loading in the near-field zone

UMR



Dinner Presentation -19

QUAKE-INDUCED SETTLEMENT OF APPROACH FILLS

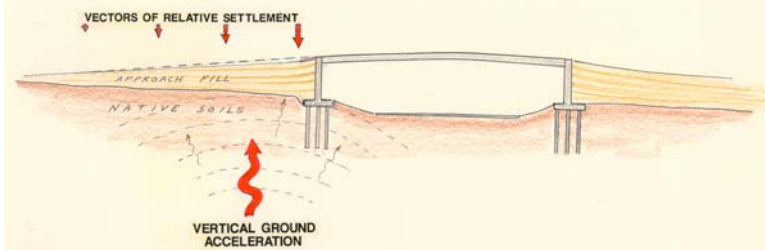

- Regardless of the compactive effort engendered to filled ground during placement, these materials tend to compress during earthquake-induced shaking, often causing abrupt settlement of the approach fills at the abutments.

Dinner Presentation -20

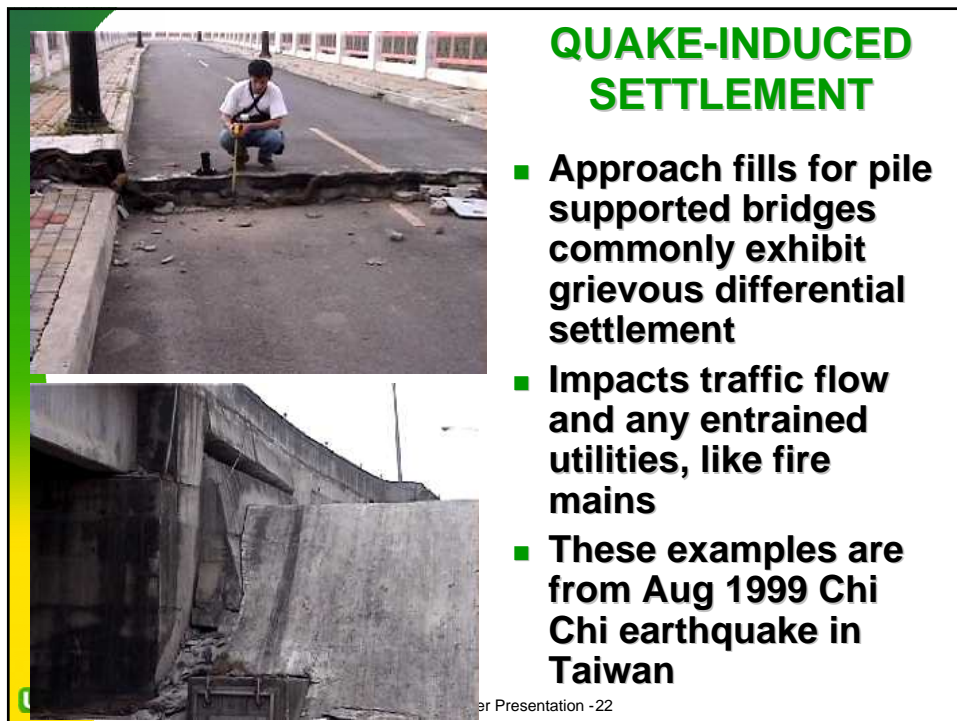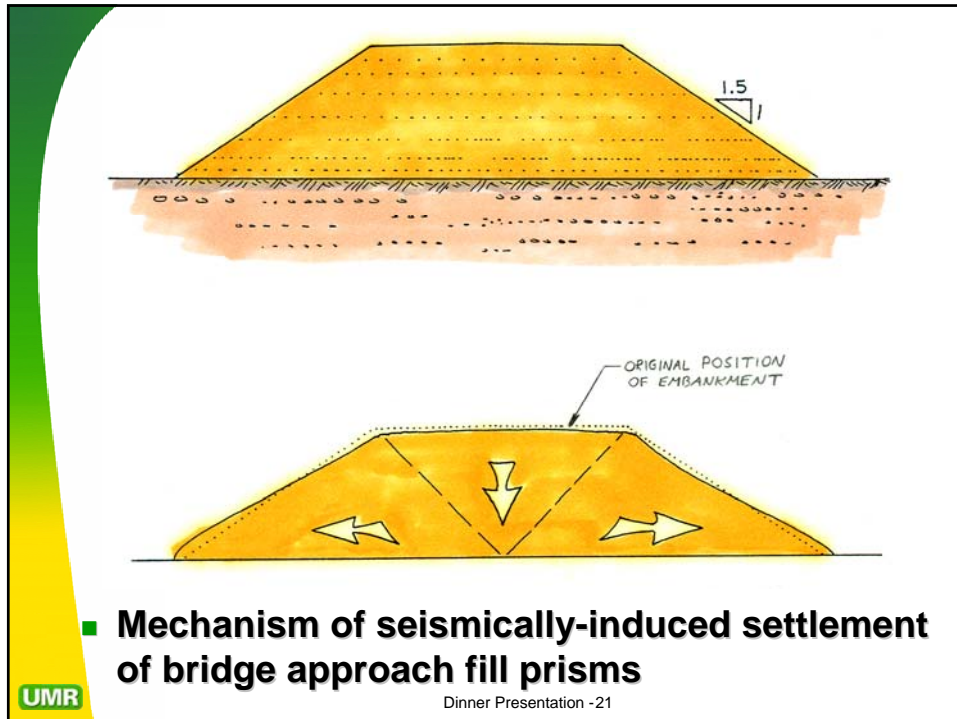




APPROACH FILL SETTLEMENT

- Seismically-induced settlement and lurching of approach fills for the Cayumapa River Bridge near Valdivia, Chile, which occurred during the M9.5 May 1960 earthquake
- Replacement structure being constructed in lower view, using Geofoam

resentation -23

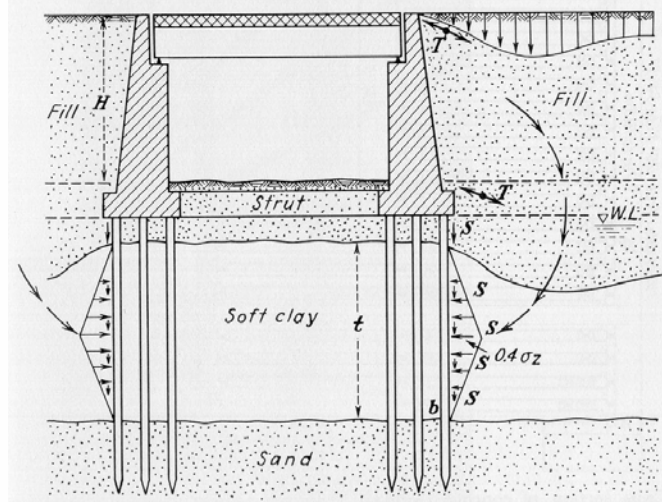

- Tschebotarioff (1973) presented case studies of pile supported bridges that failed because of approach fill settlement.

SETTLEMENT OF APPROACH FILL



- Crib wall supported approach fill for pile supported bridge. As fill consolidated, crib wall deformed and supporting piles deflected inward, towards channel. Taken from Tschetarioff (1973).

UMR

Dinner Presentation -25

LIQUEFACTION



- Bridge failures during April 1991 M7.5 Costa Rica earthquake
- Though supported on steel and concrete piles respectively, these bridges both failed due to liquefaction of foundation materials, which tilted the piles

Dinner Presentation -26




LIQUEFACTION

Liquefaction is a failure mechanism by which cohesionless materials lose shear strength when the pore pressure is excited to a level equal to the effective confining stress. Usually limited to the upper 50 feet and typically occurs in silt, sand and fine gravel.



UMR

Dinner Presentation -27

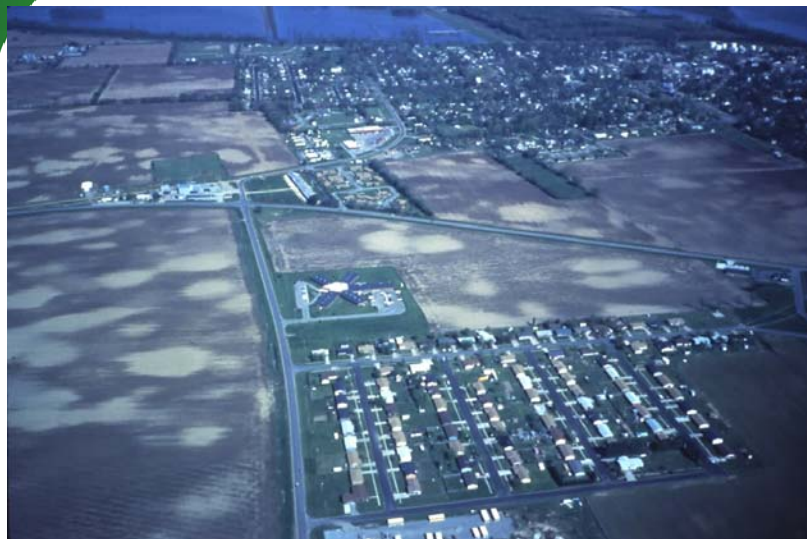

- Recent sand blows dot the landscape surrounding New Madrid, MO, testifying to massive liquefaction

UMR

Dinner Presentation -28



- **Enormous tracts of land exhibit evidence of paleoliquefaction – on a grandiose scale**

UMR

Dinner Presentation -29



- **Farm lands west of Big Lake, AR reveal a series of linear fissures which disgorged liquefied sand from beneath a silt cover.**

UMR

Dinner Presentation -30

PALEOLIQUEFACTION STUDIES




- C14 dating of organics caught in sand boils and dikes are used to date past earthquakes. Three M7.5 to M8 paleoevents have been conclusively dated: ~1450, ~900 and ~550 AD.

UMR

Dinner Presentation -31

Paleoliquefaction Assessments

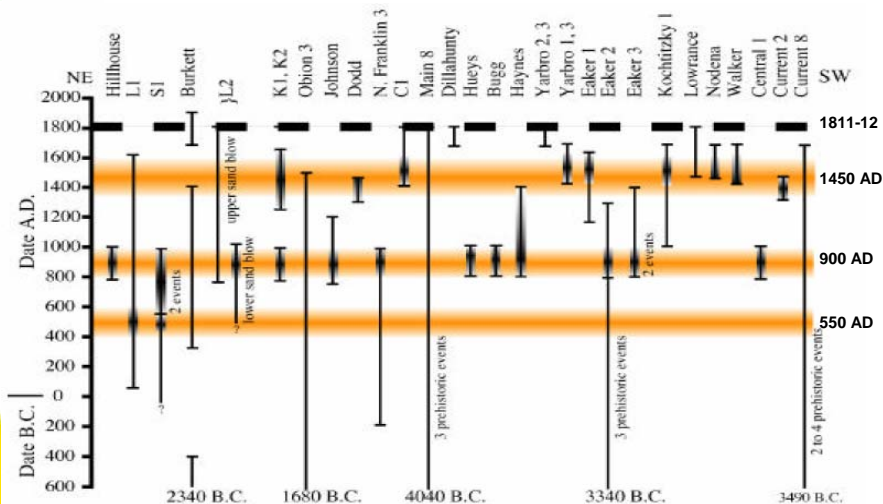


Shaded orange lines show most probable ages of major earthquakes in the NMSZ prior to 1811-12 (shown as dashed line)

UMR

Dinner Presentation -32


Liquefaction of Confined Horizons Causes Lateral Spreads

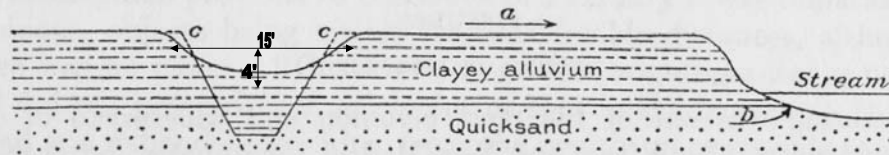

- Lateral spreads** were initially recognized and identified by USGS geologist Myron Fuller while studying the effects of the 1811-12 New Madrid earthquakes between 1905-12. Fuller made the sketch above, noting that: *"The depth of the openings was not usually very great, probably being in most cases limited to the hard clayey zone extending from the surface down to the quicksand which usually underlies the surface soil at depths of from 10 to 20 feet."*

UMR

Dinner Presentation -33

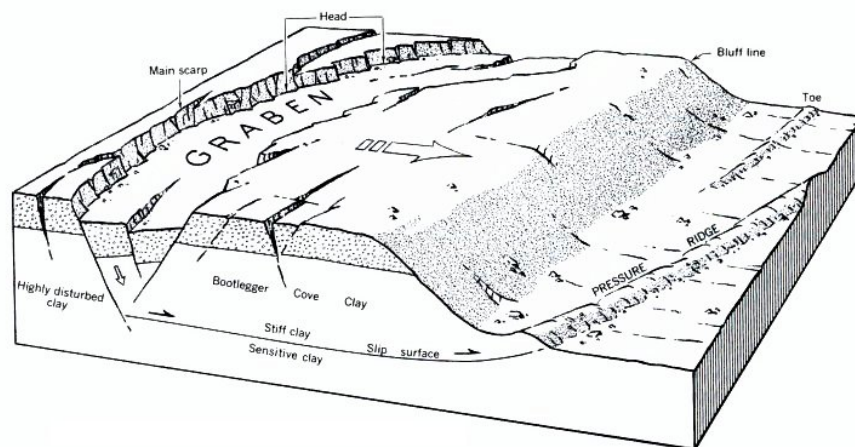


Block diagram of a lateral spread which evolved from post-1964 earthquake evaluations in Alaska by Walt Hansen in USGS Professional Paper 542-A (1966)

UMR

Dinner Presentation -34

LATERAL SPREADING

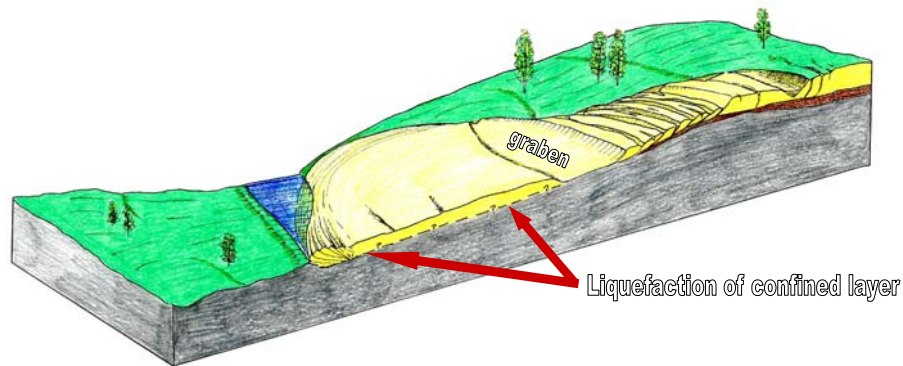


- Lateral spreads can exhibit different length-to-depth ratios, depending on soil sensitivity. Liquefaction occurs along discrete horizons which are confined, allowing lateral translation of rafted material, usually towards open channels or depressions.

UMR

Dinner Presentation -35

Topographic Expression of Lateral Spreads Near Helena, Arkansas


- Divergent contours
- Stepped topography
- Headscarp evacuation grabens
- Arcuate headscarps

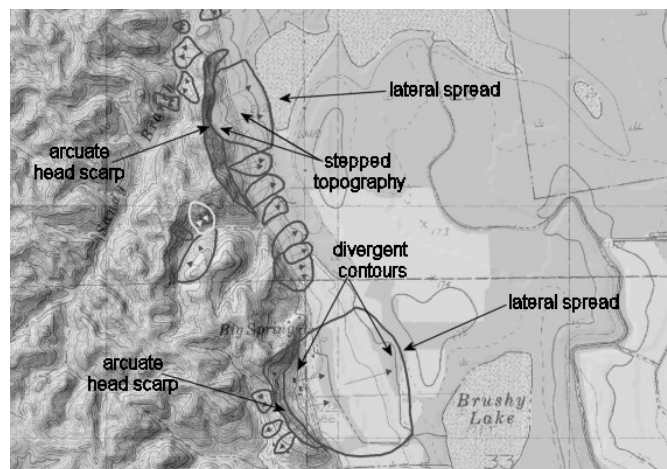


UMR

Dinner Presentation -36



Jeffersonville Lateral Spread Along Crowley's Ridge ~ 25 km north of Helena, Arkansas

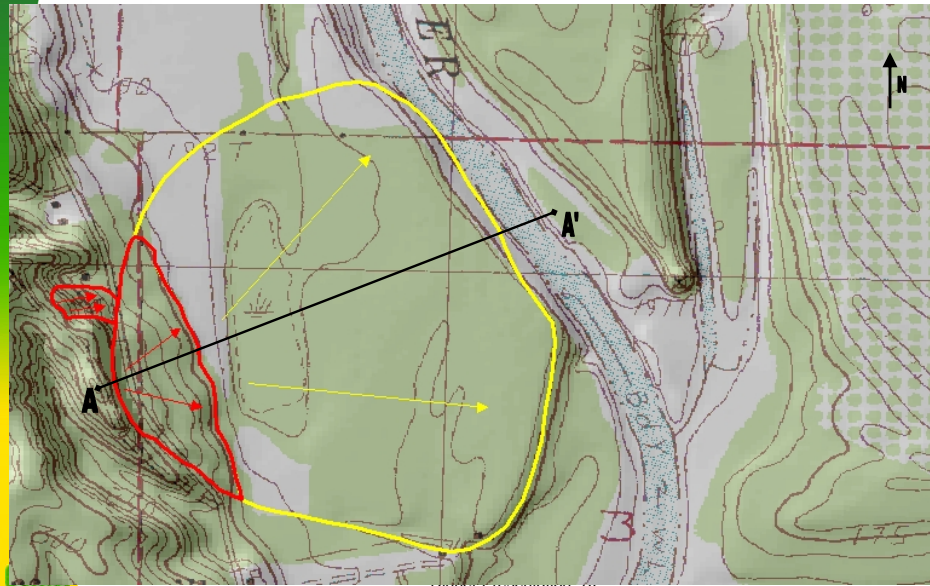


Cross-section through Jeffersonville Lateral Spread and Crowley's Ridge

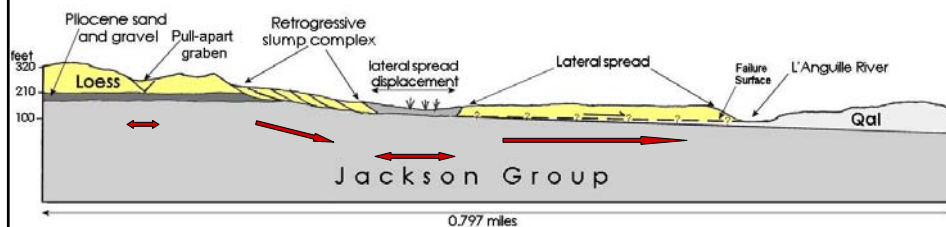

The Jeffersonville Lateral Spread feature appears to have been triggered by the 1811-12 New Madrid earthquake sequence, with the ground translating easterly into the L'Anguille River, near its mouth with the St. Francis River. The eastern escarpment of Crowley's Ridge is peppered with similar features.

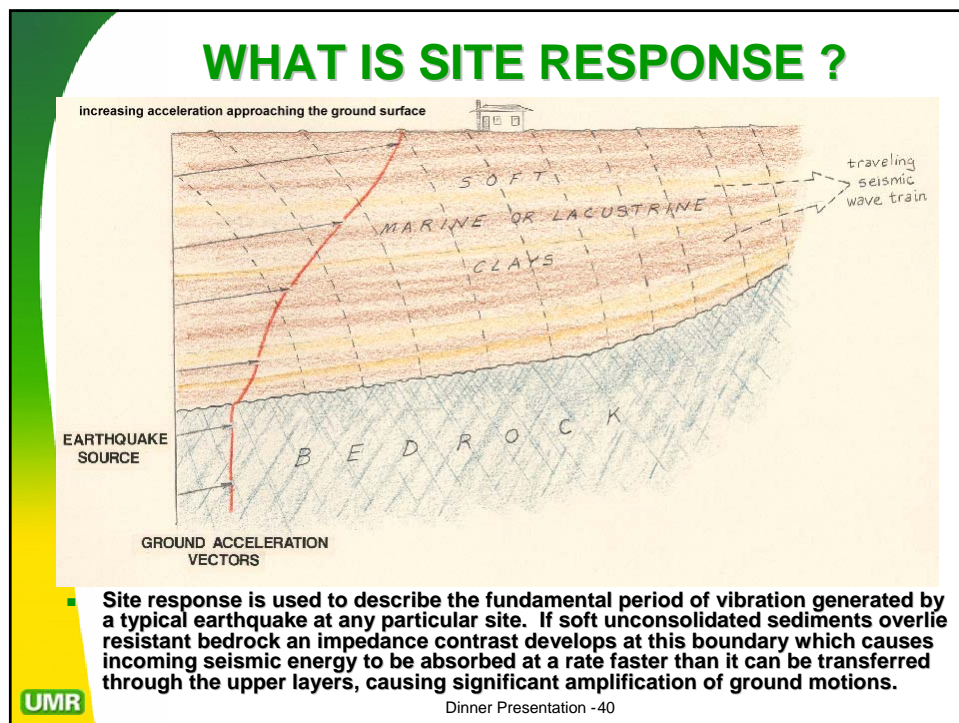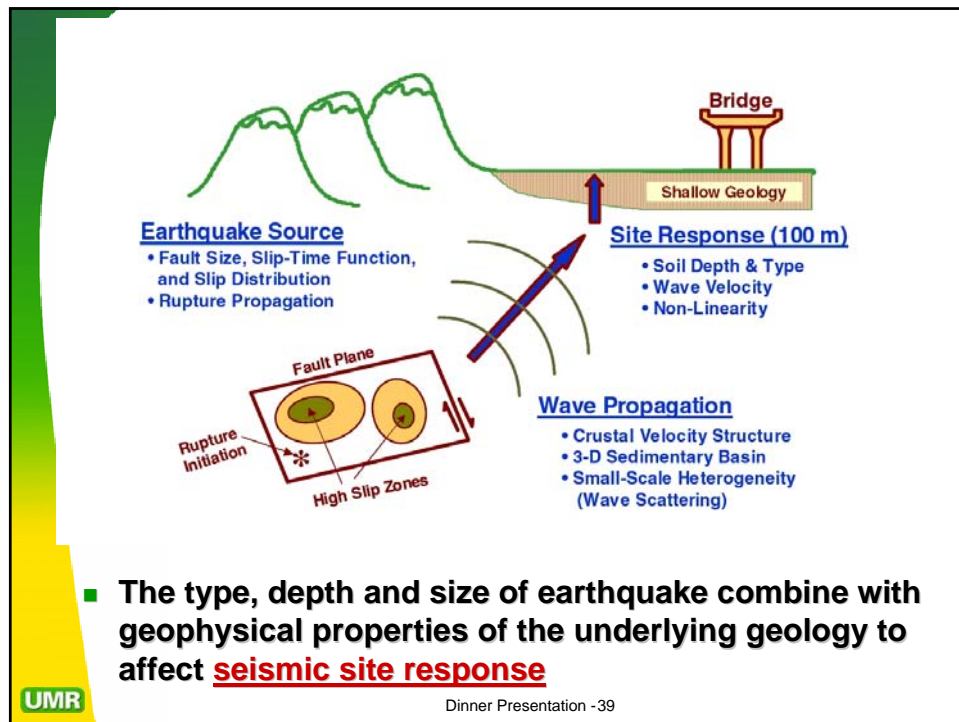

SOFT SEDIMENTS UNDERLYING MEXICO CITY

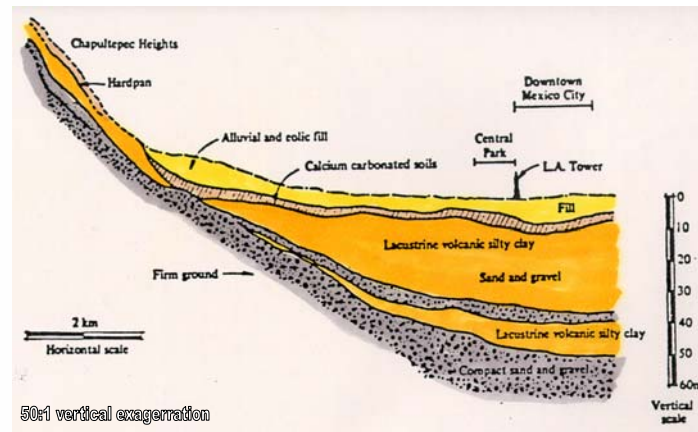


- Generalized geologic cross section of the southern margins of the lacustrine basin underlying Mexico City. The lacustrine sediments were covered with fill as the city developed. These soft materials amplified the incoming seismic wave train from a M.8.1 earthquake located 52 km off the coast of Michoacan Province, some 350 km from Mexico City!

UMR

Dinner Presentation -41

ZONE OF HEAVIEST DAMAGE DURING 1985 MEXICO CITY EARTHQUAKE

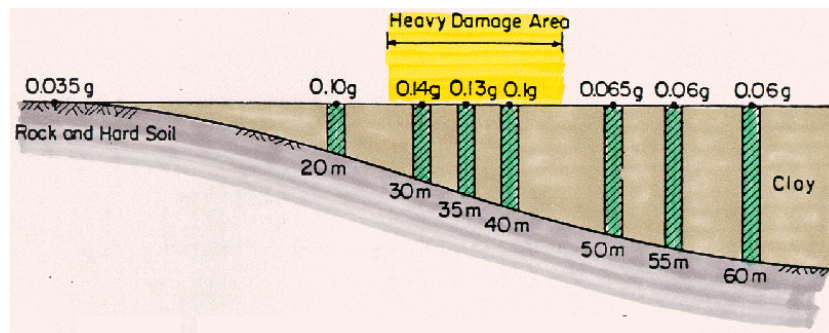


- Computed distribution of peak ground surface accelerations for typical soil profiles in Mexico City, bounding the zone that experienced severe damage during the 1985 M. 8.1 Michoacan earthquake. The earthquake epicenter was 350 km from Mexico City and lasted close to 3 minutes. More than 500 buildings within the highlighted zone were severely damaged and 100 buildings between 6 and 22 stories high actually collapsed; killing 9,500, injuring 30,000 and leaving 100,000 homeless.

UMR

Dinner Presentation -42

VARIANCE OF RESPONSE SPECTRA WITH SEDIMENT THICKNESS IN MEXICO CITY

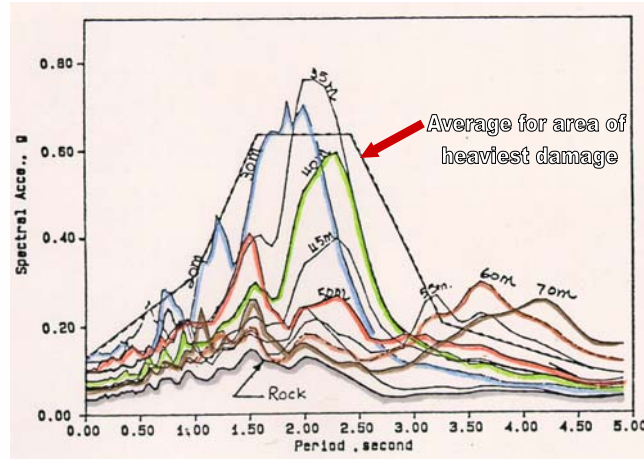


- Response spectra calculated for different thicknesses of soft sediments in southern Mexico City, between downtown and Chapultepec Heights. **Note impact of 30 to 45 m thickness.**

UMR

Dinner Presentation -43

MODES OF VIBRATION

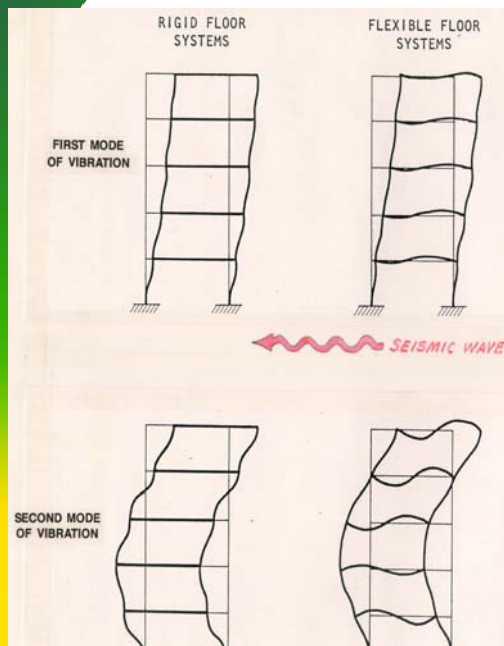


- All structures possess fundamental modes of vibration which depend on their skeletal make-up: including material type, shear panels, connections, span distances and symmetry.
- This fundamental mode is known as the "first mode of vibration" and it generally controls the seismic design of most symmetrical structures.
- Secondary modes of vibration become increasingly important in complex structures with asymmetrical form or stiffness, or structures with damaged frames.

UMR

Dinner Presentation -44

SITE RESPONSE VERSUS STRUCTURAL RESPONSE

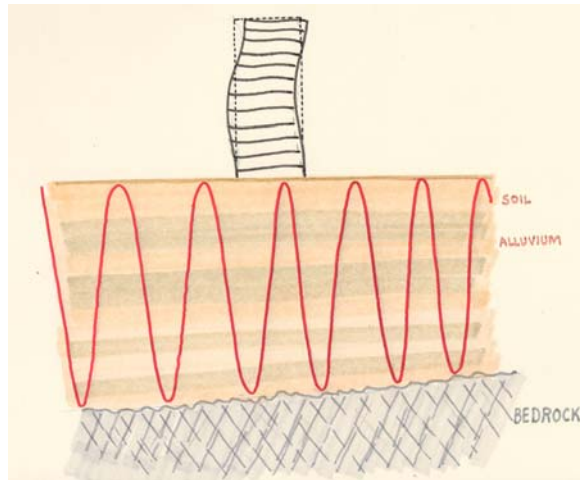


- The fundamental period of vibration of any structure depends on its design and construction details. If the site period and structural period converge, a resonant frequency results which may be an order of magnitude greater than the natural site period, and the structure will be severely damaged or destroyed.

UMR

Dinner Presentation -45


OUT-OF-PHASE MOTION

- Adjacent structures can react differently to seismic excitation, depending on focal aspects of incoming energy, long period motion, site amplification, and degrading structural response as frames become damaged

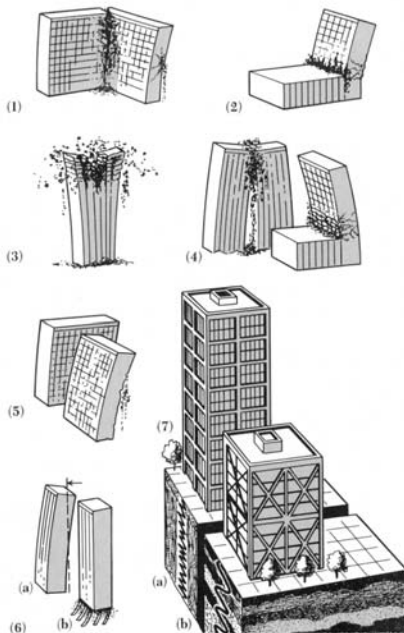


UMR

Dinner Presentation -46

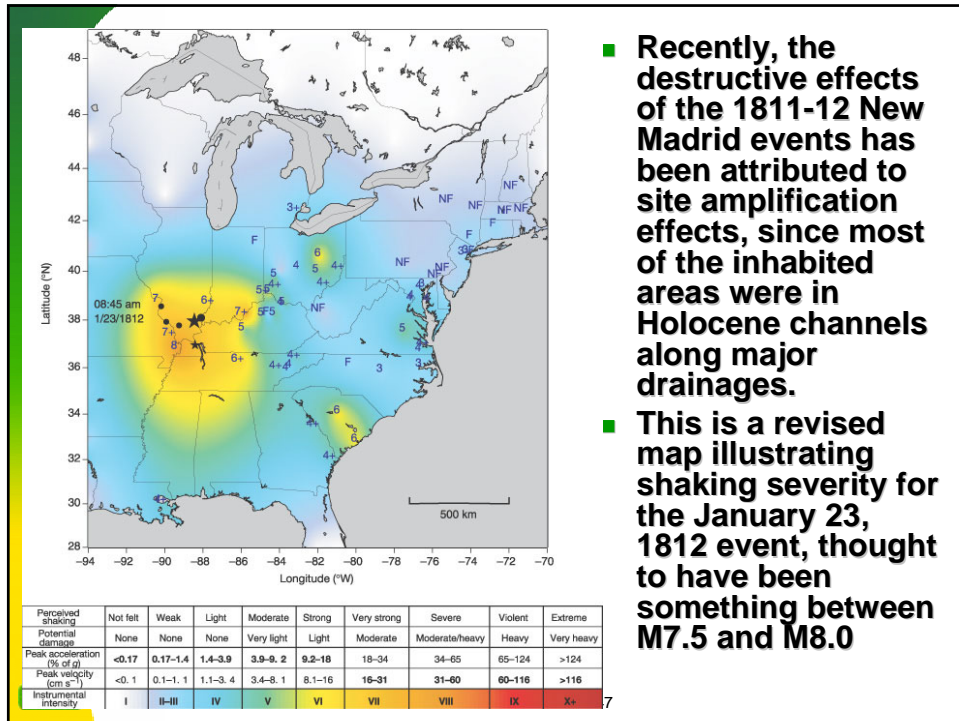


- Recently, the destructive effects of the 1811-12 New Madrid events has been attributed to site amplification effects, since most of the inhabited areas were in Holocene channels along major drainages.
- This is a revised map illustrating shaking severity for the January 23, 1812 event, thought to have been something between M7.5 and M8.0

Geology Northern Mississippi Embayment

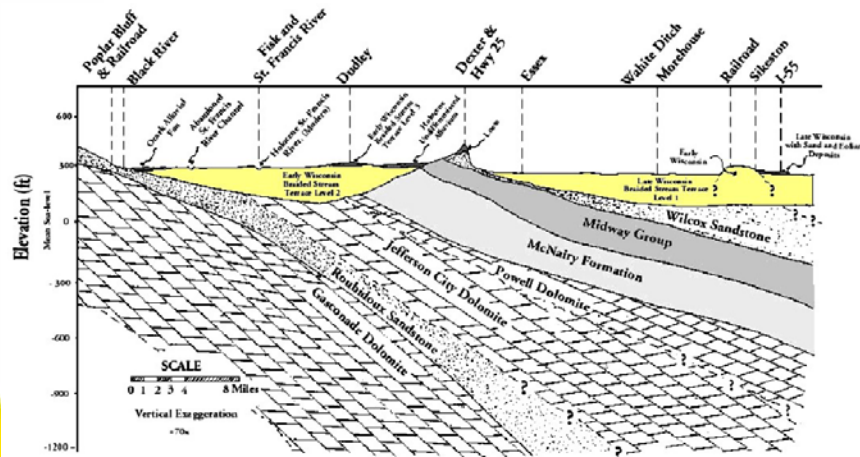

Impedance contrasts within the Wisconsin age river channels (yellow) likely pose the greatest seismic threat to highway infrastructure in the Midwest.

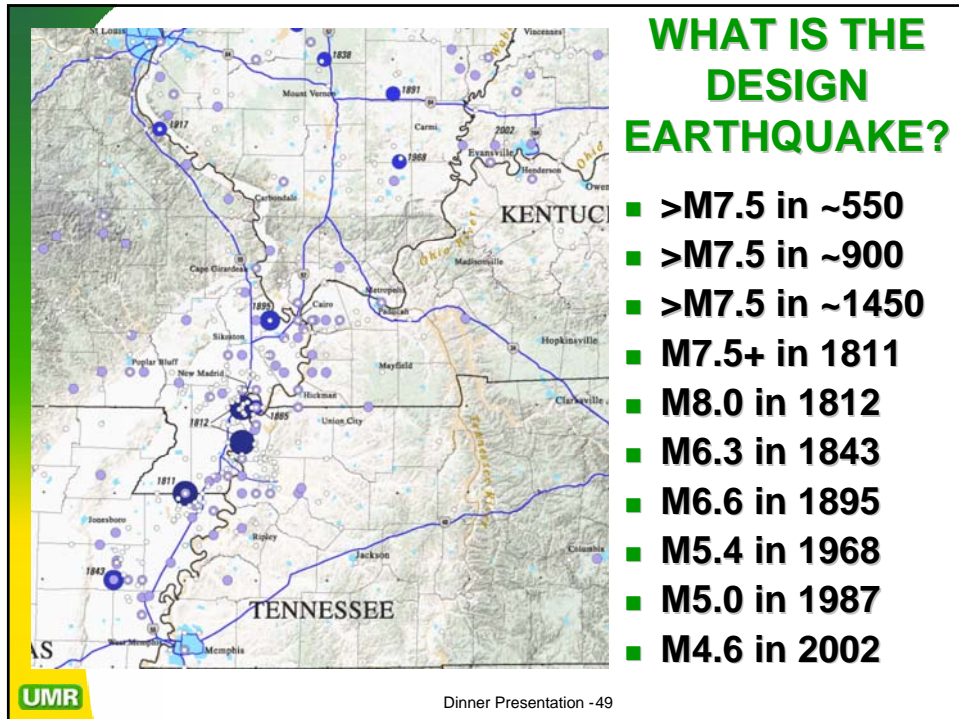


Recurrence Intervals for New Madrid Earthquake Events*

Magnitude	Recurrence Interval
4.0	14 Months
5.0	10 – 12 Years
6.0	70 – 90 Years
7.0	254 – 500 Years
8.0	550 – 1200 Years

* based on existing data; always subject to update and revision

UMR Dinner Presentation -50

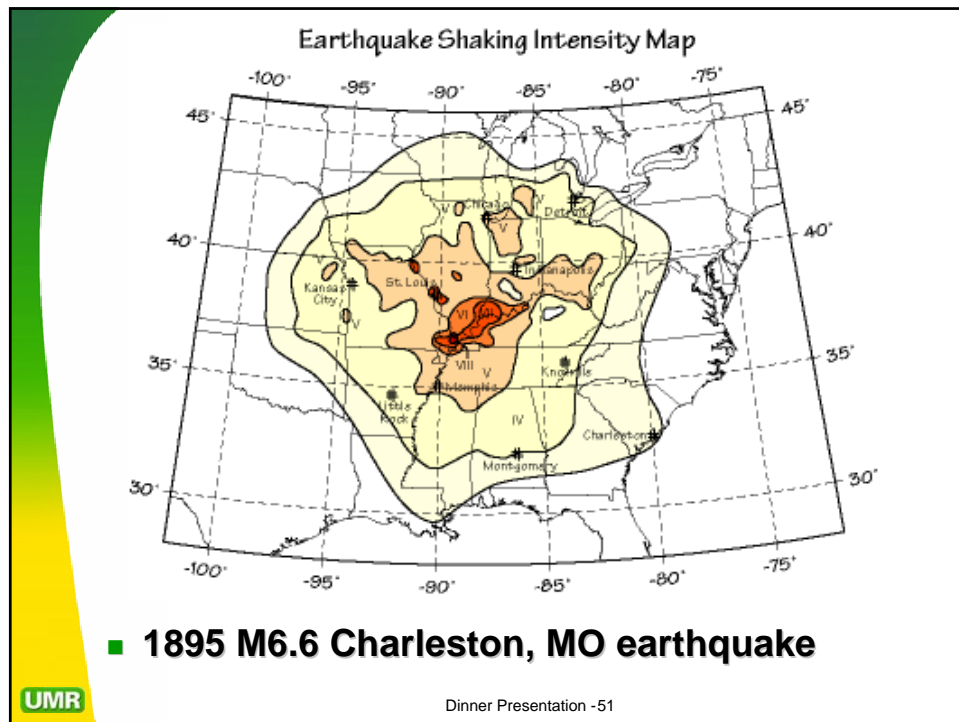

1895 M6.6 Charleston, MO Quake

- October 31, 1895 Magnitude 6.6 Earthquake near Charleston Missouri. Modified Mercalli Intensity VIII
- **Largest earthquake to occur in the Mississippi Valley region since the 1811-1812 New Madrid earthquake sequence.** The estimated body-wave magnitude of this event is 5.9 and the surface-wave magnitude estimate is 6.7.
- People in 23 states felt this earthquake which caused extensive damage. to a number of structures in the Charleston region, including schools, churches, and homes. Structural damage and liquefaction were reported along a line from Bertrand, MO to Cairo, IL. The most severe damage occurred in Charleston, Puxico, and Taylor, Missouri; Alton, and Cairo, Illinois; Princeton, Indiana; and Paducah, Kentucky.
- The earthquake caused extensive damage (including downed chimneys, cracked walls, shattered windows, and broken plaster) to school buildings, churches, private houses, and to almost all the buildings in the commercial section of Charleston, MO. That's the reason the epicenter was assumed to be near Charleston.

UMR

Dinner Presentation -52

Illinois Central Bridge at Cairo, IL




UMR

Dinner Presentation -53

- The Illinois Central Railroad bridge across the Ohio River at Cairo, IL was the longest iron or steel bridge in world when completed in 1889 (4 miles).
- One of its masonry bents was cracked and severely damaged during Oct 1895 Charleston, MO quake



SHAKING INTENSITY versus DISTANCE

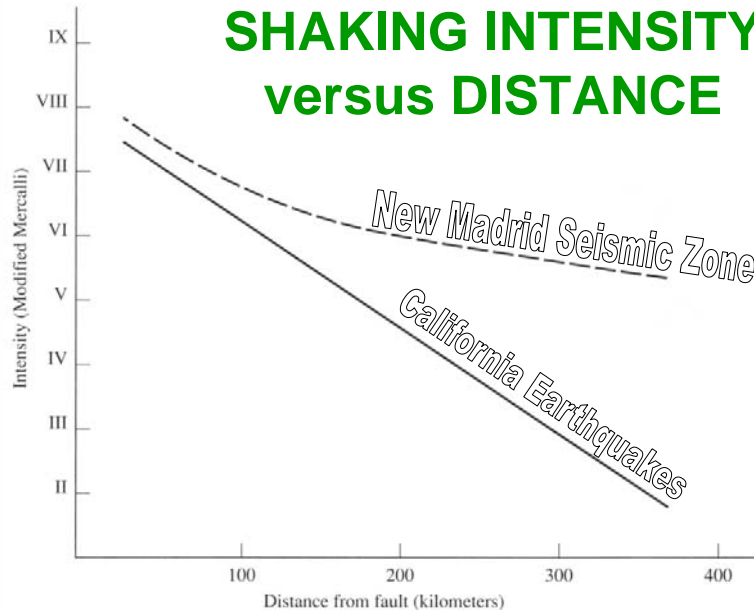

UMR


Midwest quakes are less frequent, but much more lethal than California quakes because there is less damping of seismic energy.

Dinner Presentation -54

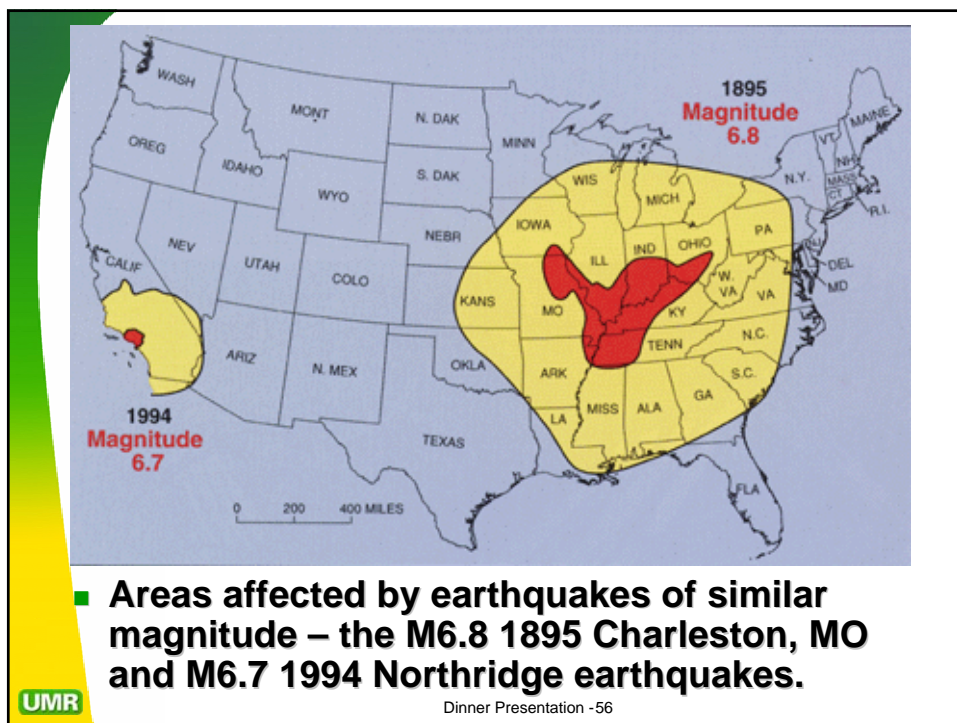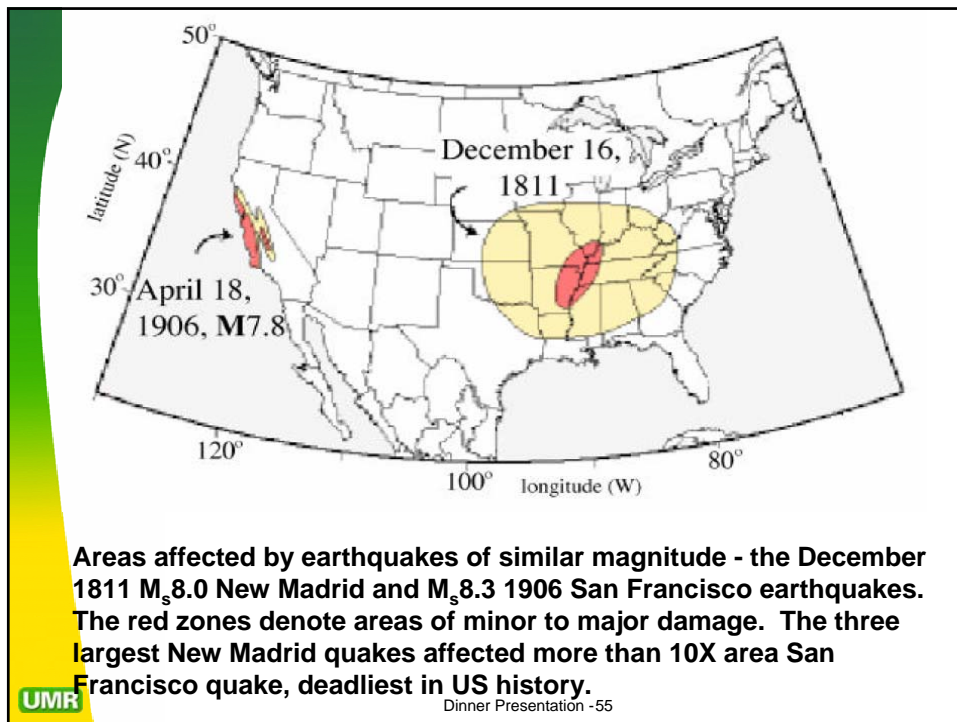

Current and Proposed MODOT Standards for Seismic Design

- **Green lines** are current ASSHTO design parameters using USGS 10% PE (1988)
- **Red lines** are proposed design parameters using USGS 2% PE (1996)

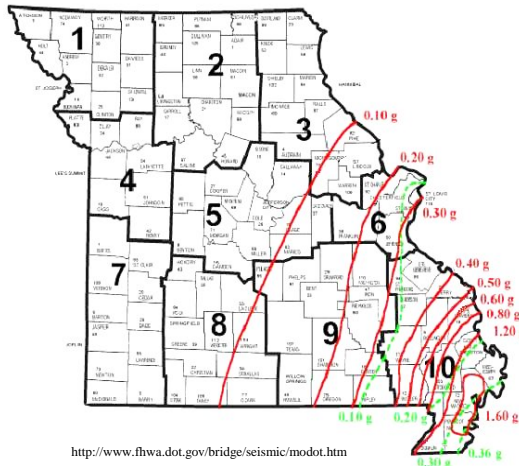

<http://www.fhwa.dot.gov/bridge/seismic/modot.htm>

Dinner Presentation -57

SCREENING ANALYSES

- **Risk assessment** is perhaps the most nefarious aspect of our profession. If we wanted to know the 100 year recurrence frequency flood, we would need 1000 years of flow records.
- We have a significant risk of future destructive earthquakes in the Midwest. But, our probabilistic models are based solely on data gathered from the New Madrid Seismic Zone, ignoring other likely sources.
- **Screening analyses** allow us to identify the structures with the greatest risk-consequence of failure and prioritize bridges based on seismic vulnerability.

UMR

Dinner Presentation -58

EXAMPLE SCREENING ANALYSIS

- A preliminary site response evaluation was undertaken on three bridge sites along the Missouri River, located between **215 and 257** km from the New Madrid Seismic Zone.
- In our lifetimes, the most likely earthquake to impact these structures would be a repeat of the M6.6 Charleston, MO quake of 1895, which has a recurrence frequency of 70+/- 15 years (overdue since 1980).


TECHNICAL APPROACH

- Model one-dimensional equivalent linear site response and liquefaction susceptibility at the bridge sites.
- Liquefaction potential assessed through a two part qualitative and quantitative analysis.
- Generate artificial time histories using Boore's (2001) SMSIM code for base rock input motions.
- Simulation of seismic wave propagation through the surficial materials using the program DEEPSOIL by Park and Hashash (2003).


Missouri River Bridges with High Quality Geotechnical Data

- Page Extension Missouri River Bridge explored in 1996. 215 km from NMSZ
- Page Extension Creve Coeur Lake Memorial Park Bridge explored in 1996. 215 km from NMSZ
- Proposed State Route 19 replacement for Hermann, Missouri Bridge explored in 1999. 257 km from the NMSZ


Bridge Locations With Respect to the New Madrid Seismic Zone

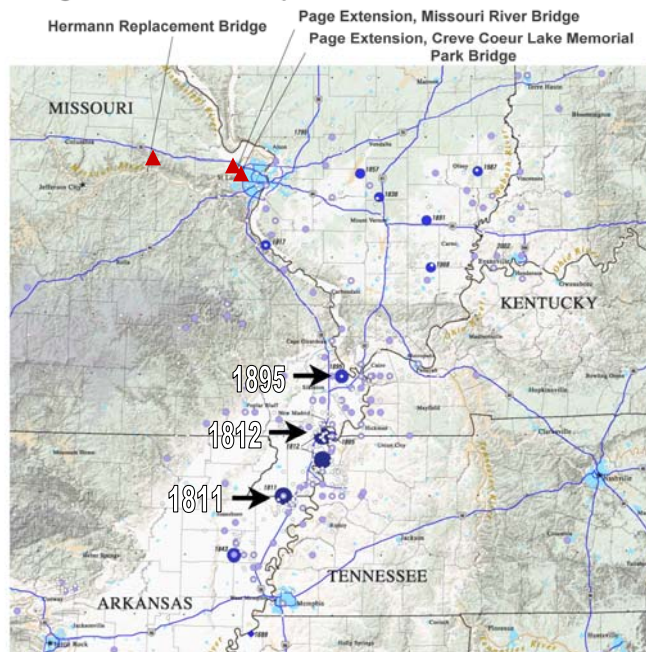

LENGTHENING of SEISMIC WAVE TRAIN with DISTANCE from SOURCE

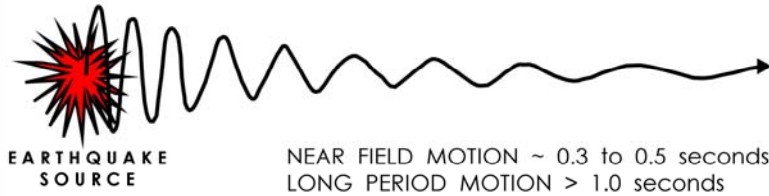

FUNDAMENTAL PERIOD vs STRUCTURE HEIGHT

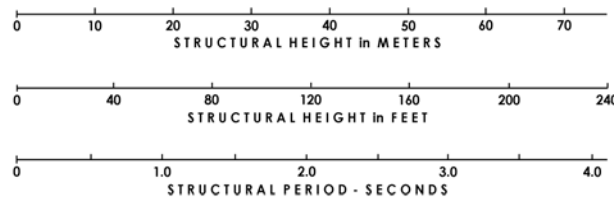


- Long period motions ($T > 1.0$ second) of great import when evaluating structures > 160 km from the quake hypocenter

Dinner Presentation -63

UMR

FUNDAMENTAL PERIOD of SAND-FILLED BEDROCK CHANNEL

$$T_s = \frac{4 * D}{V_{s_f}} \quad \text{where} \quad \begin{array}{l} D = \text{depth of channel fill} \\ V_{s_f} = \text{shear wave velocity of channel fill} \end{array}$$

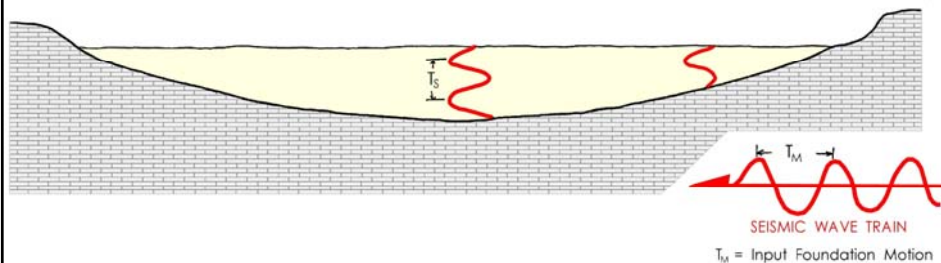


- We can estimate the fundamental site period with some basic data. The period will change with location in a parabolic shaped channel.

UMR

Dinner Presentation -64

IMPEDANCE

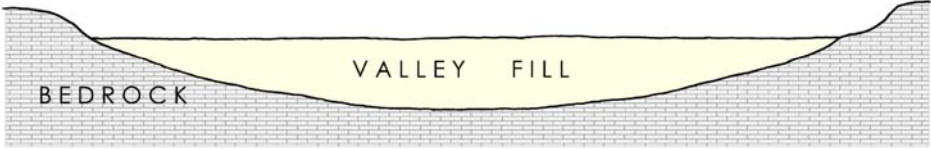

$$\text{IMPEDANCE RATIO} = \frac{\rho_{\text{FOUNDATION}} * V_s \text{ BEDROCK}}{\rho_{\text{VALLEY FILL}} * V_s \text{ VALLEY FILL}}$$

- Site amplification is a function of the Impedance Ratio between the valley fill and the underlying basement rock. **Impedance Ratios in Midwestern US channels are among the most excessive examples identified anywhere in the world.**

UMR

Dinner Presentation -65

Estimating V_s from $(N_1)_{60}$


Regression Equation for Predicting V_s (m/s)	
FC < 10 %	$V_s = 95.5(N_1)_{60}^{0.226}$
FC = 10-35 %	$V_s = 103.4(N_1)_{60}^{0.205}$
FC = 0-40 %	$V_s = 101.8(N_1)_{60}^{0.205}$

$(N_1)_{60}$ in blows/0.3 meter

UMR

Andrus et al., 2004
Dinner Presentation -66

SHEAR WAVE VELOCITY CORRELATIONS

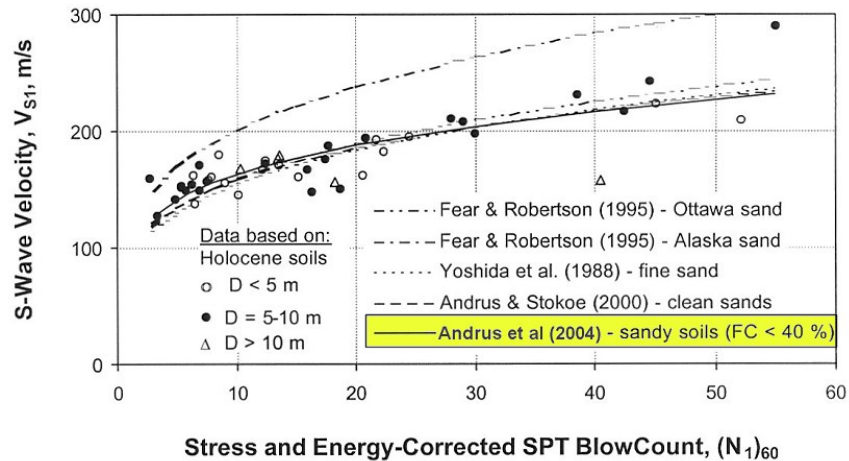


Andrus et al., 2004

Dinner Presentation -67

UMR

LATERAL INCOHERENCE

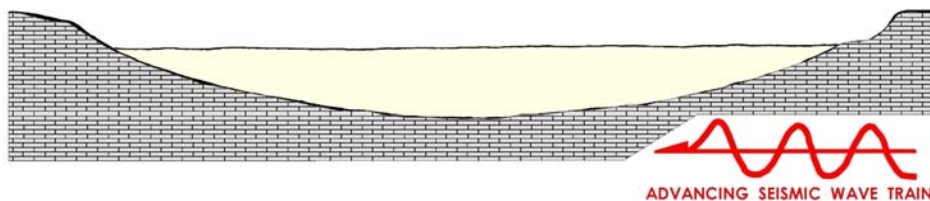

- If we attempted to model the dynamic system created by the channel's interaction with an extremely long bridge structure, we would have to consider lateral and vertical incoherence of the foundations. This is usually performed in a full-blown dynamic analysis, not in a screening analysis.


UMR

Dinner Presentation -68


UNDERLYING GEOLOGY

- The Missouri River bridges are founded on up to 31 m of unconsolidated loess, channel sands, silts, and oxbow clays/silts.
- Channel fill is unconsolidated Holocene age material; mostly saturated channel sands with low relative density
- Underlying bedrock is stiff Paleozoic age limestone, dolomite, and shale.
- All three bridges cross **asymmetric channels**, with bedrock on one abutment and unconsolidated sediment beneath the other.

Page Extension, Missouri River

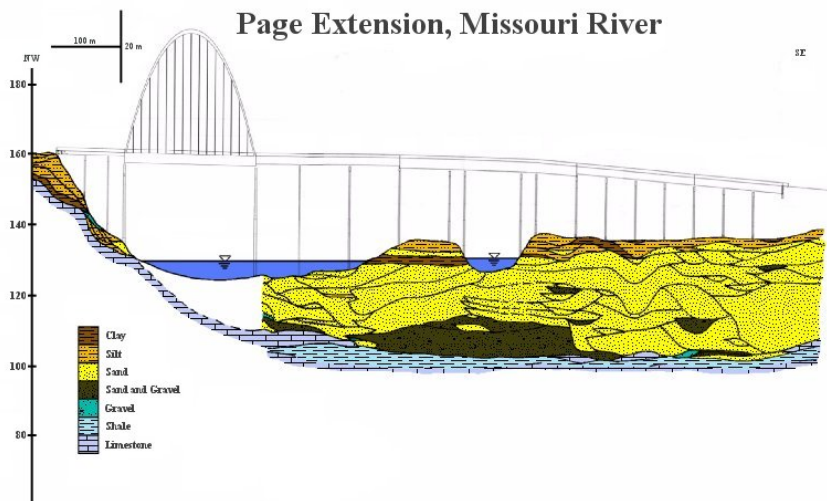


Page Extension, Creve Coeur Lake Memorial Park

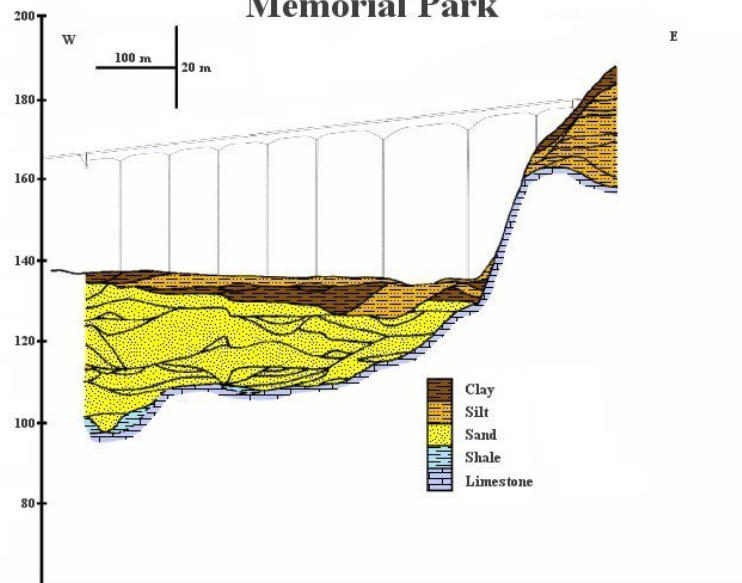

UMR

Hermann

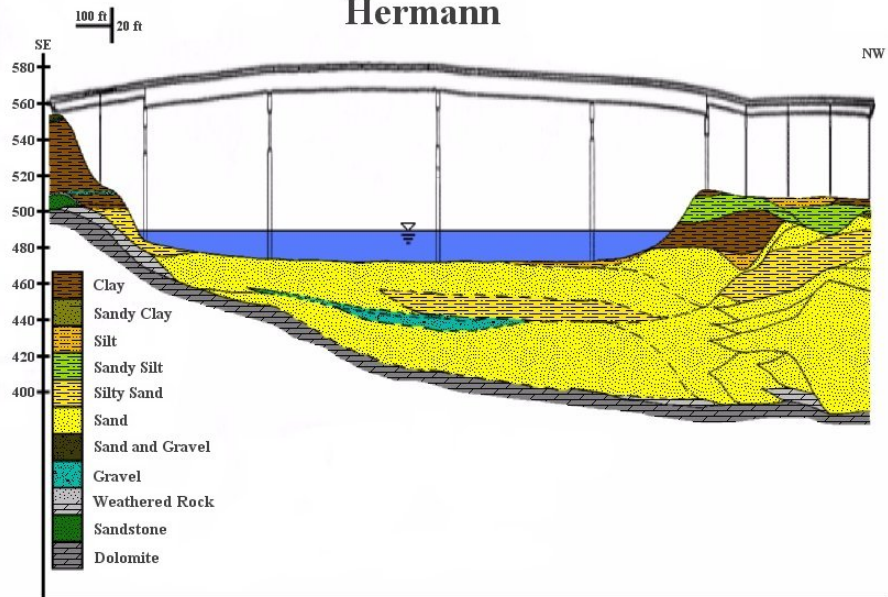

UMR

Generation of Artificial Time Histories

- Artificial time histories were generated using SMSIM code developed by Dave Boore of the USGS and modified by Bob Herrmann at St. Louis University for Midwest deep soil sites.

Model	NAME	SITE EFFECT
1	Atkinson-Boore 1995 (AB95)	ENA Hard Rock
2	USGS 1996	Generic B-C Boundary
3	USGS 1996 (modified)	Mid-Continent Deep Soil (new)
4	Mid-America Deep Soil AB95 source (modified)	Mid-Continent Deep Soil (new)
5	Mid-America Deep Soil USGS 96 source (modified)	Mid-Continent Deep Soil (new)

UMR

Dinner Presentation -73


ARTIFICIAL TIME HISTORIES FOR SCREENING ANALYSES GENERATED FOR THREE HISTORIC EVENTS EMANATING FROM THE NEW MADRID SEISMIC ZONE:

- 16 Dec 1811 $M_s 8.6 = M7.3$ event
- 7 Feb 1812 $M_s 8.0 = M7.5$ event
- 31 Oct 1895 $M_s 6.8 = M6.6$ event

UMR

Dinner Presentation -74

Page Avenue Missouri River Bridge Artificial Time Histories

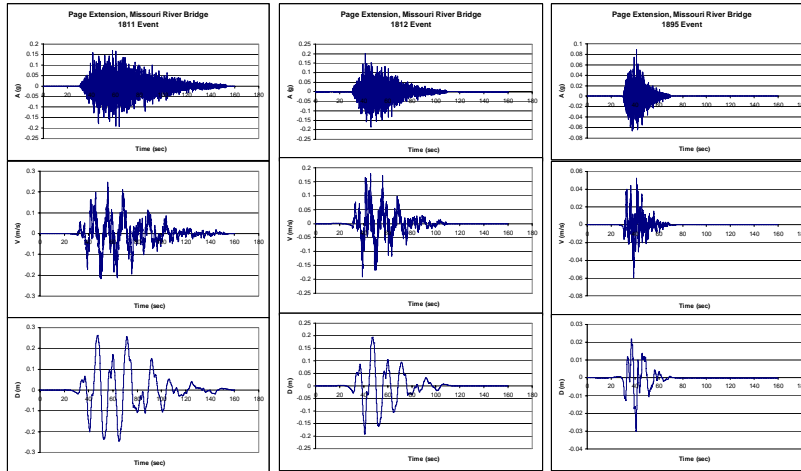

1811


1812

1895

UMR

Dinner Presentation -75

Creve Coeur Lake Bridge Artificial Time Histories

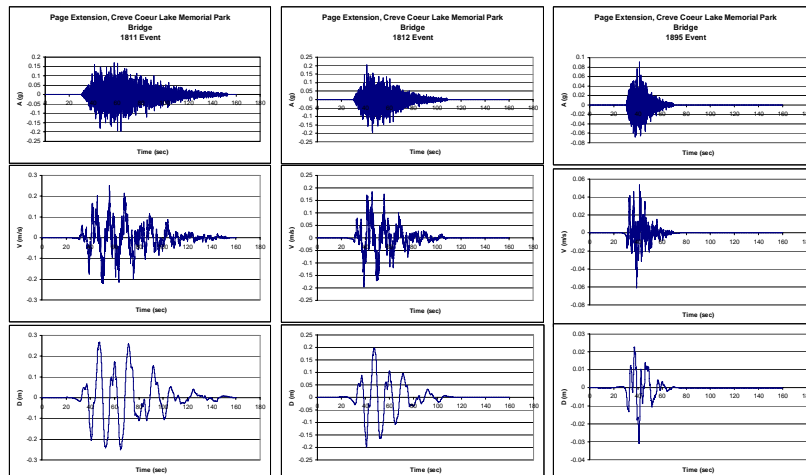

1811


1812

1895

UMR

Dinner Presentation -76

Hermann Bridge Site Artificial Time Histories

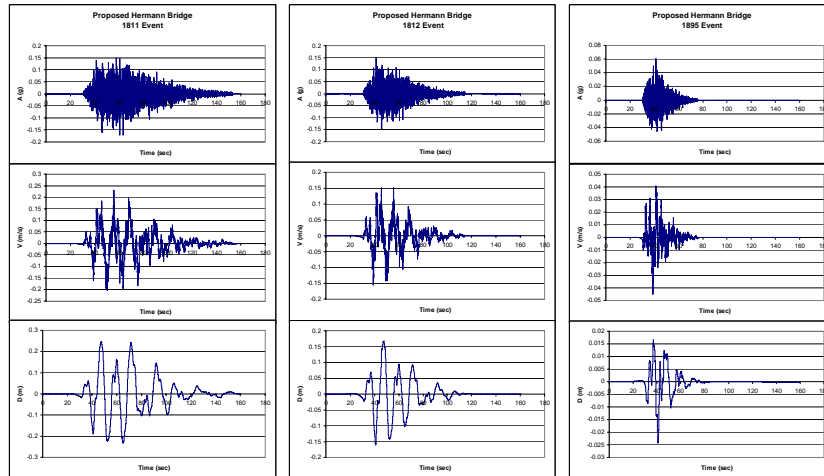

1811

1812

1895

UMR


Dinner Presentation -77

Screening Analysis for Liquefaction Potential

- Recommend using:
T. L. Youd, 1998, *Screening Guide for Rapid Assessment of Liquefaction Hazard at Highway Bridge Sites*:
Technical Report MCEER-98-0005
- It employs a **Qualitative Analysis**; and
- A **Quantitative Analysis**
- Good idea to include both

UMR

Dinner Presentation -78

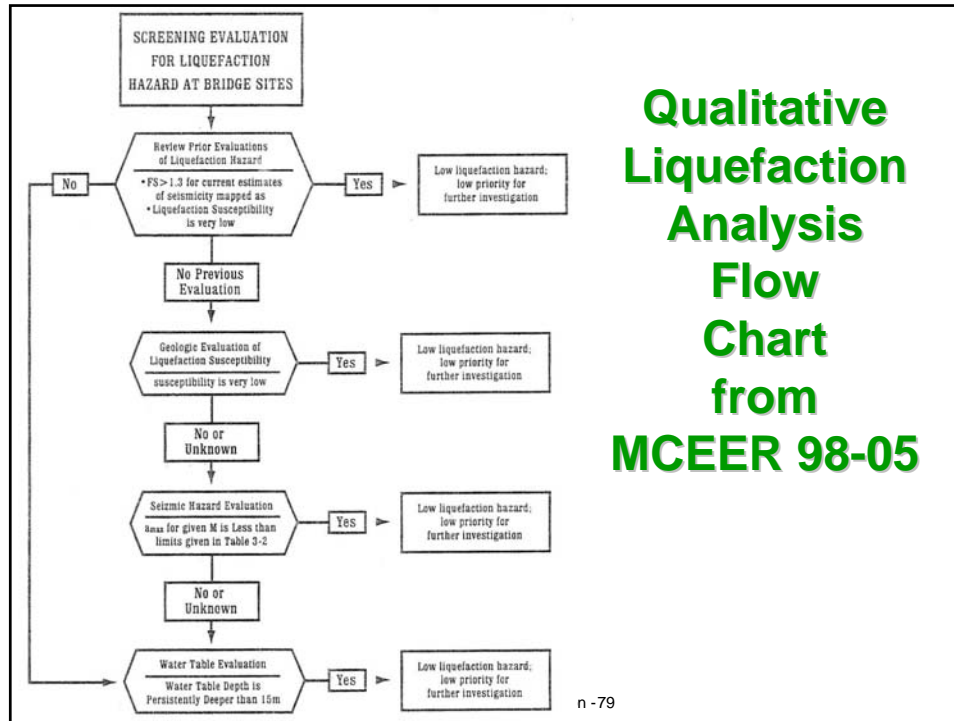

GEOLOGIC EVALUATION

Type of Deposit	<500 yr	Holocene	Pleistocene	Pre-Pleistocene
River Channel	Very High	High	Low	Very Low
Flood Plain	High	Moderate	Low	Very Low
Alluvial Fan	Moderate	Low	Very Low	Very Low
Delta	High	Moderate	Low	Very Low
Lacustrine	High	Moderate	Low	Very Low
Colluvium	High	Moderate	Low	Very Low
Glacial Till	Low	Low	Very Low	Very Low

SEISMIC EVALUATION

Earthquake Magnitude	Soil Profile Type I and II (Stiff Sites)	Soil Profile Type III and IV (Soft Sites)
	Very Low Hazard for	
$M < 5.2$	$A_{max} < 0.4g$	$A_{max} < 0.1g$
$5.2 < M < 6.4$	$A_{max} < 0.1g$	$A_{max} < 0.05g$
$6.4 < M < 7.6$	$A_{max} < 0.05g$	$A_{max} < 0.025g$
$7.6 < M$	$A_{max} < 0.025$	$A_{max} < 0.025$

UMR

Youd (1998)

Soil Profile Descriptions from AASHTO (1996)
Dinner Presentation -81

WATER TABLE EVALUATION

Groundwater Table Depth	Relative Liquefaction Susceptibility
$< 3 \text{ m}$	Very High
$3 \text{ m to } 6 \text{ m}$	High
$6 \text{ m to } 10 \text{ m}$	Moderate
$10 \text{ m to } 15 \text{ m}$	Low
$> 15 \text{ m}$	Very Low

UMR

Youd (1998)

Dinner Presentation -82

QUANTITATIVE ANALYSIS

Youd et al. (2001)

- Based on T. L. Youd et al., 2001, *Liquefaction Resistance of Soils: Summary Report from the 1996 NCEER and 1998 NCEER/NSF Workshops on Evaluation of Liquefaction Resistance of Soils*: ASCE Journal of Geotechnical and Geoenvironmental Engineering
- **Cyclic Stress Ratio (CSR)** vs. **Cyclic Resistance Ratio (CRR)** (normalized for M 7.5)
- **Factor of Safety** (includes a magnitude scaling factor)

UMR

Dinner Presentation -83

MAGNITUDE SCALING FACTORS for calculating liquefaction factor of safety can be estimated from published charts

Magnitude, <i>M</i>	Seed and Idriss (1982)		Ambraseys (1988)	Arango (1996)		Andrus and Stokoe (1997)	Youd and Noble (1997b)		
	Idriss	Idriss*		Distance based	Energy based		$P_L < 20\%$	$P_L < 32\%$	$P_L < 50\%$
5.5	1.43	2.20	2.86	3.00	2.20	2.8	2.86	3.42	4.44
6.0	1.32	1.76	2.20	2.00	1.65	2.1	1.93	2.35	2.92
6.5	1.19	1.44	1.69	1.60	1.40	1.6	1.34	1.66	1.99
7.0	1.08	1.19	1.30	1.25	1.10	1.25	1.00	1.20	1.39
7.5	1.00	1.00	1.00	1.00	1.00	1.00	—	—	1.00
8.0	0.94	0.84	0.67	0.75	0.85	0.8?	—	—	0.73?
8.5	0.89	0.72	0.44	—	—	0.65?	—	—	0.56?

Note: ? = Very uncertain values.

*1995 Seed Memorial Lecture, University of California at Berkeley (I. M. Idriss, personal communication to T. L. Youd, 1997).


taken from Youd et al. (2001)

UMR

Dinner Presentation -84

Page Ave. Missouri River Bridge CSR vs. CRR

Page Extension, Missouri River Bridge Boring B2-41
1811 Event

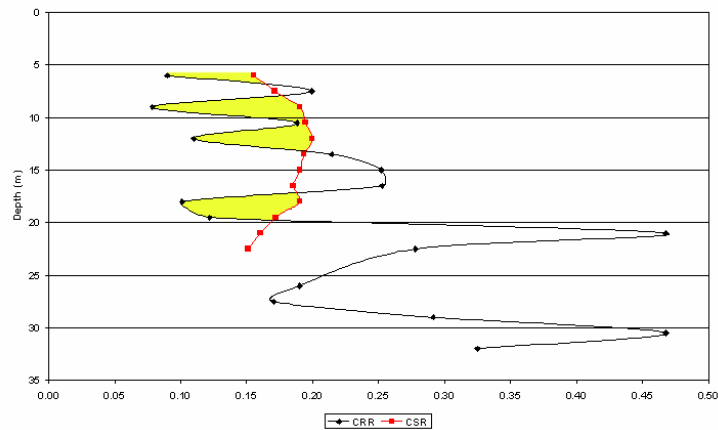


UMR

Dinner Presentation -85

M8_s.6

Page Ave. Missouri River Bridge Liquefaction Factor of Safety

Page Extension, Missouri River Bridge Boring B2-41
Factor of Safety

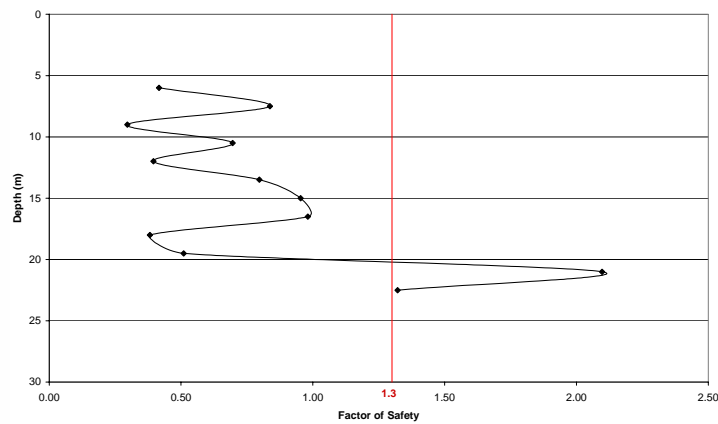


UMR

Dinner Presentation -86

M8_s.6

Page Ave. Missouri River Bridge CSR vs. CRR

Page Extension, Missouri River Bridge Boring B2-41
1812 Event

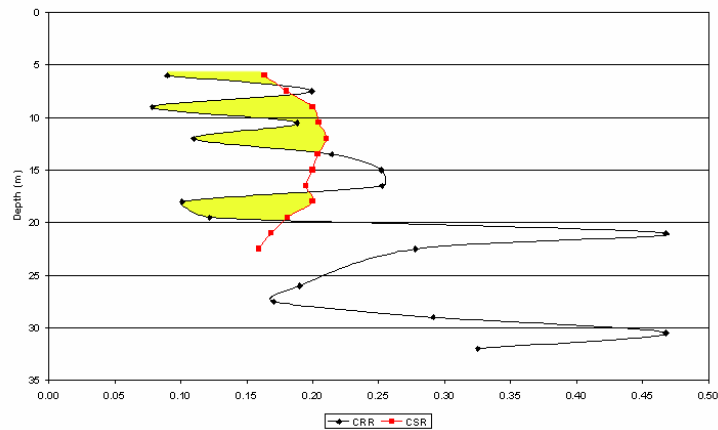


UMR

Dinner Presentation -87

M_{8.6}

Page Ave. Missouri River Bridge Liquefaction Factor of Safety

Page Extension, Missouri River Bridge Boring B2-41
Factor of Safety

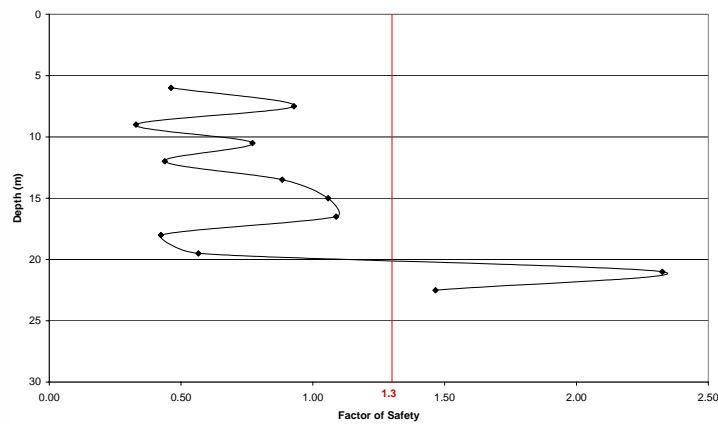


UMR

Dinner Presentation -88

M_{8.6}

Page Ave. Missouri River Bridge CSR vs. CRR

Page Extension, Missouri River Bridge Boring B2-41
1895 Event

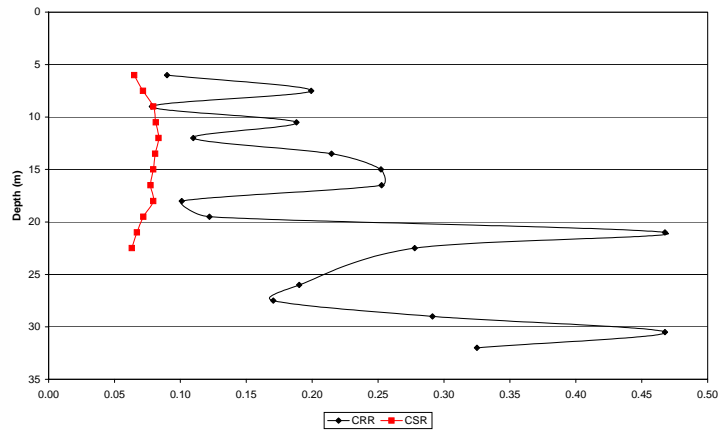


UMR

Dinner Presentation -89

M8.6

Page Ave. Missouri River Bridge Liquefaction Factor of Safety

Page Extension, Missouri River Bridge Boring B2-41
Factor of Safety

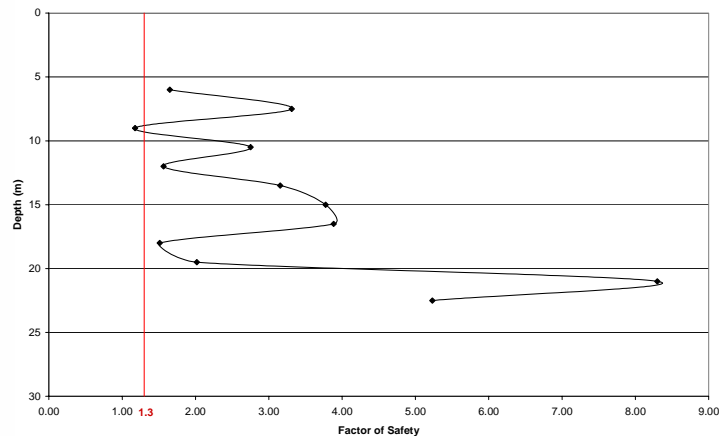


UMR

Dinner Presentation -90

M_s8.6


1D Seismic Site Response Equivalent Linear Approach

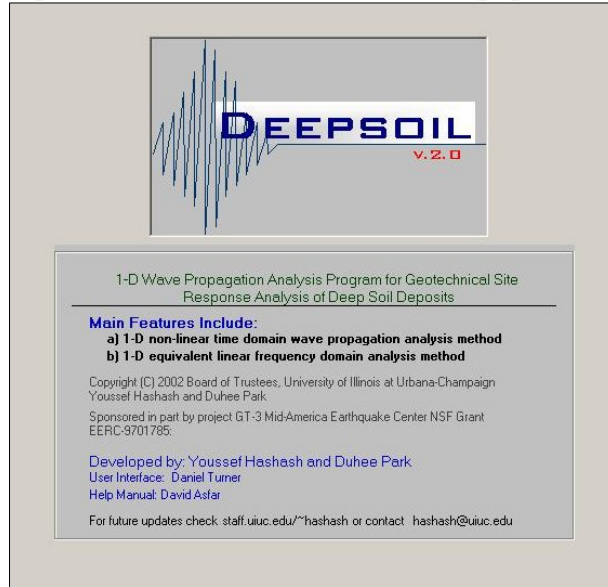

UMR

EPRI GENERIC MODULUS REDUCTION CURVES


- Soil parameters correlated from Corrected SPT blow counts.
- Dynamic soil parameters estimated to fit modulus reduction and damping curves recommended by EPRI (1993)

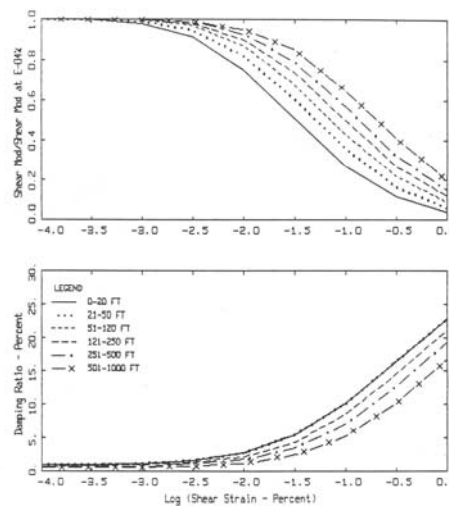


EPRI (1993)

UMR

EPRI Curves Approximated

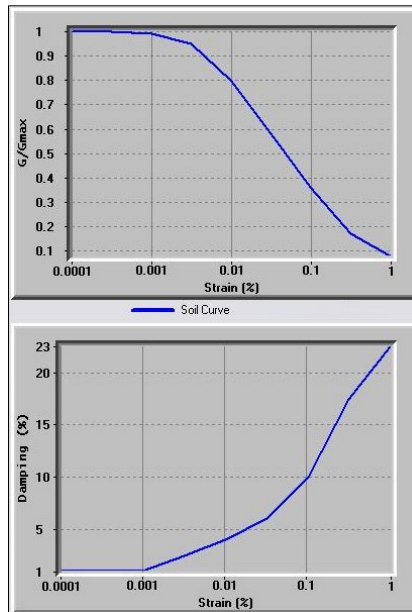


UMR

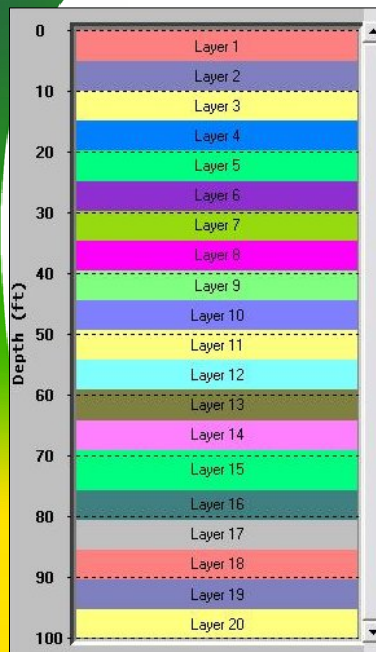


UMR

**Soil Parameter
Input Interface
using DEEPSOIL
1-D wave
propagation
analysis**

Page Ave. Missouri River Bridge M8.6 1811 NMSZ Event

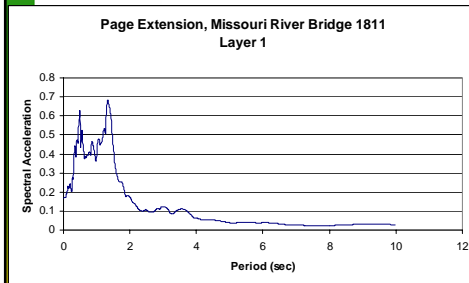

At ground surface

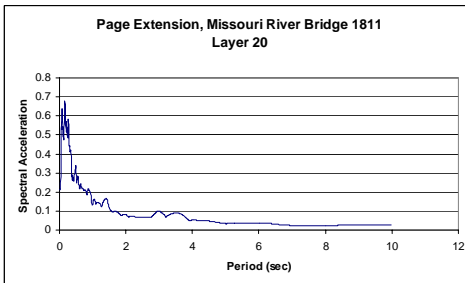


At bedrock interface


UMR

Dinner Presentation -95

Page Ave. Missouri River Bridge M8.0 1812 NMSZ Event

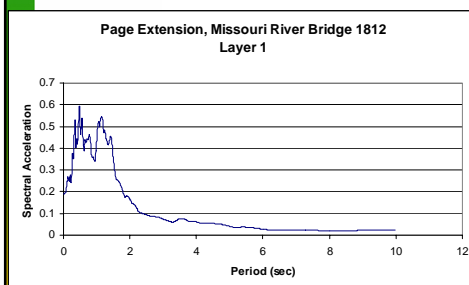

At ground surface

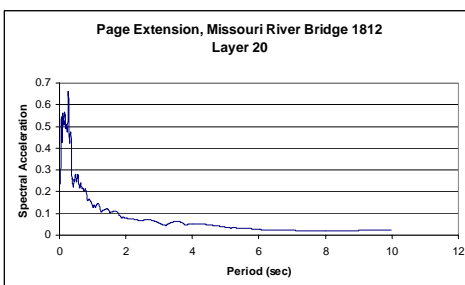


At bedrock interface

UMR


Dinner Presentation -96

Page Ave. Missouri River Bridge M6.6 1895 NMSZ Event

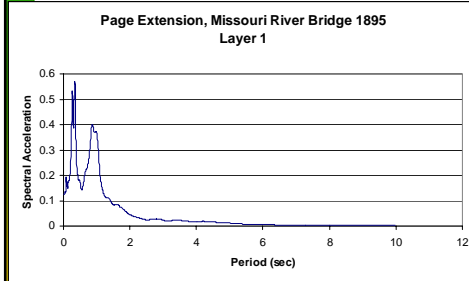

At ground surface
Increases to 0.58 g


UMR

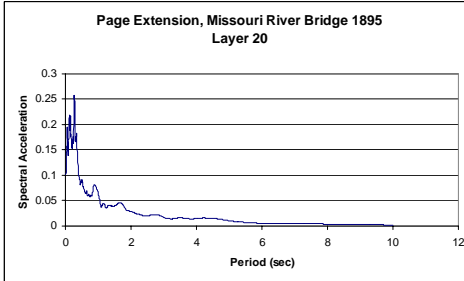

At bedrock interface
 $a_{\max} = 0.22g$


Dinner Presentation -97

Page Ave. Creve Coeur Lake Memorial Park Bridge M8.6 1811 Event

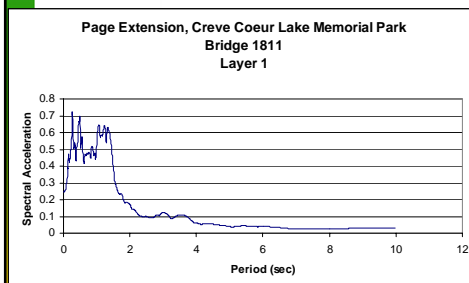

At ground surface


UMR

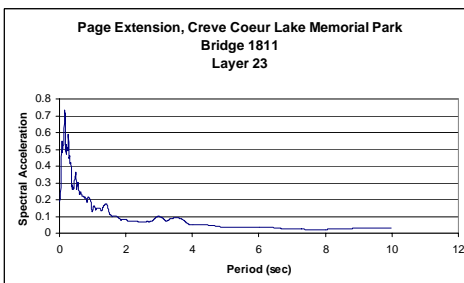


At bedrock interface

Dinner Presentation -98

Page Ave. Creve Coeur Lake Memorial Park Bridge M8.0 1812 Event

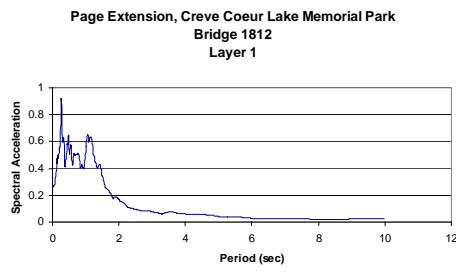

At ground surface
Increases to 0.90 g

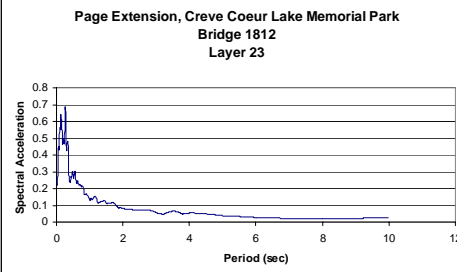


At bedrock interface
 $a_{\max} = 0.70g$


UMR

Dinner Presentation -99

Page Ave. Creve Coeur Lake Memorial Park Bridge M6.6 1895 Event

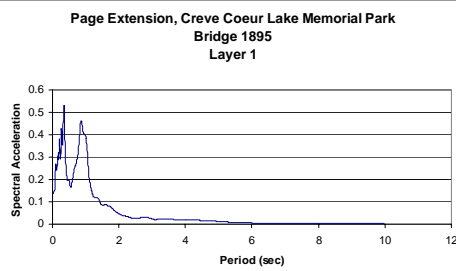

At ground surface
Increases to 0.53 g

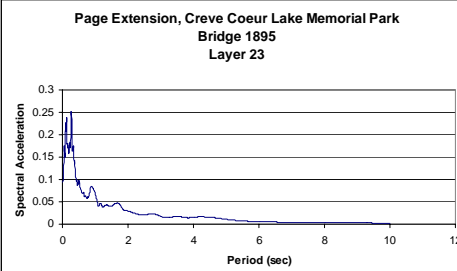


At bedrock interface
 $a_{\max} = 0.24g$


UMR

Dinner Presentation 100

Hermann Bridge Site M8.6 1811 Event

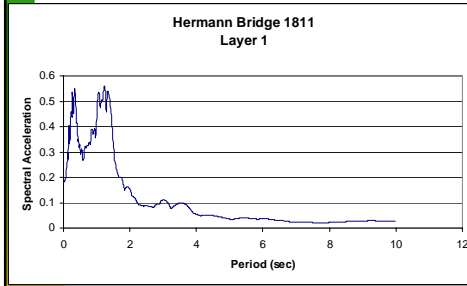

At ground surface
Increases to 0.56 g

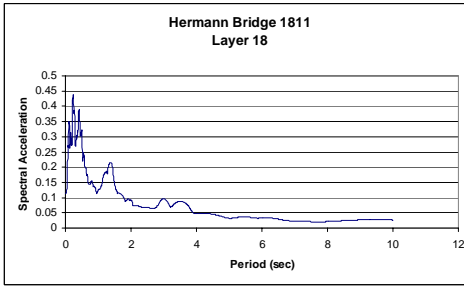


At bedrock interface
 $a_{\max} = 0.44g$


UMR

Dinner Presentation 101

Hermann Bridge Site M8.0 1812 Event

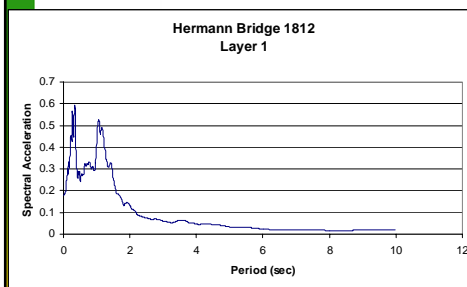

At ground surface
Increases to 0.60g

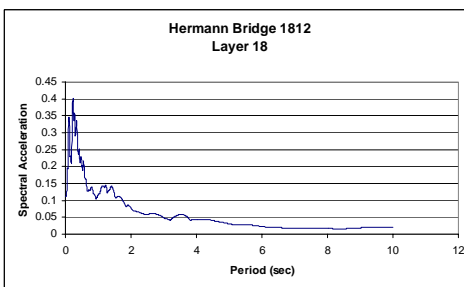


At bedrock interface
 $a_{\max} = 0.39g$


UMR

Dinner Presentation 102

Hermann Bridge Site M6.6 1895 Event

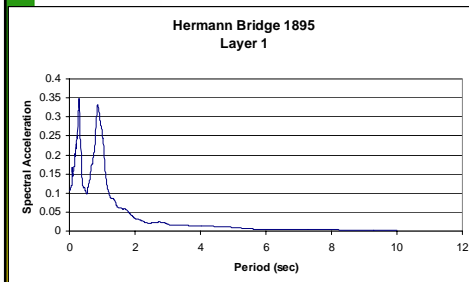

**At ground surface
Increases to 0.35g**

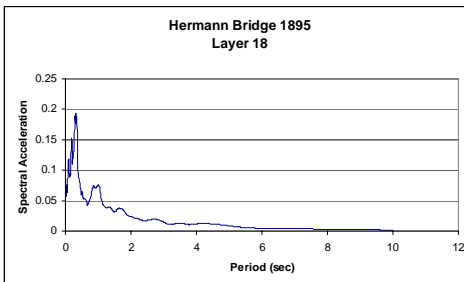


**At bedrock interface
 $a_{\max} = 0.19g$**

UMR

Dinner Presentation 103

ELEMENTS of a TYPICAL CHANNEL CROSSING

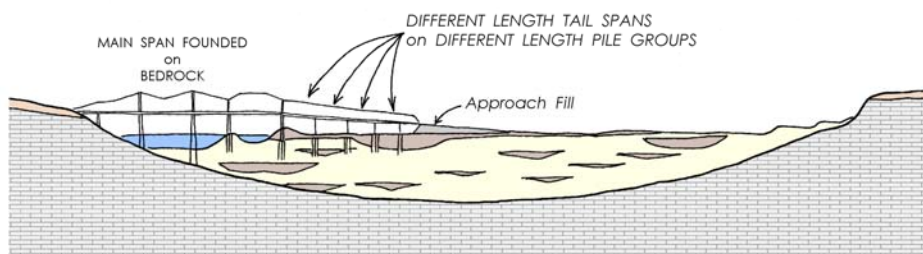


- Asymmetric channel section; Missouri river on far south side of parabolic shaped channel
- Main spans supported on stiff caissons to rock
- Tail spans supported on pile groups of differing length
- Soft pockets on old oxbows can be problematic
- Widespread liquefaction and lateral spreads likely near channels

UMR

Dinner Presentation 104

ZONES COMMONLY SUSCEPTIBLE to LIQUEFACTION

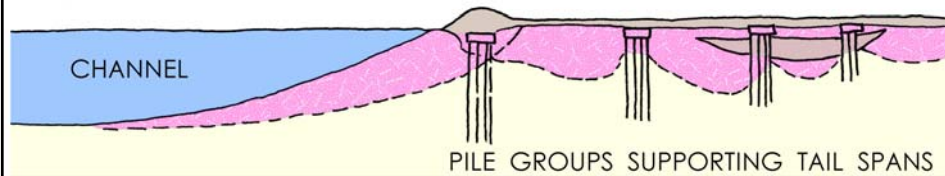

- Simply supported tail spans would appear to be most vulnerable part of existing highway bridges
- Site amplification causes long period motions to peak between 1.0 and 1.5 seconds
- We can expect liquefaction of foundations (areas shown in pink)

UMR

Dinner Presentation 105

CONCLUSIONS

- Widespread liquefaction likely in M6.6 or greater events at great range (~250 km)
- Liquefaction so severe (deep) and continuous in M7.5+ events that localized failure/tilt of supporting pile groups can be expected
- Lateral spreads can be expected near channels in those areas subject to severe liquefaction. These would destroy any pile supported structures
- Long period motions will cause significant site amplification locally, which could trigger collapse of simply supported spans at great range (~250 km)
- Two-dimensional effect of bedrock channels not considered in these screening analyses. This could make matters worse locally.

UMR

Dinner Presentation 106

About the Presenter



J. David Rogers, Ph.D., P.E., R.G. is the Karl F. Hasselmann Chair in Geological Engineering at the University of Missouri-Rolla. He can be contacted at rogersda@umr.edu

- J. David Rogers served as Chair of the Building Codes Committee of the Association of Engineering Geologists between 1990-97 and was AEG representative to the International Conference of Building Officials while the 1991, 1994 and 1997 Uniform Building Codes and 2000 International Building Code were developed.
- He has taught short courses on seismic hazards for the University of California, FEMA, California Geological Survey and the Southern California Earthquake Center.